


Tent image

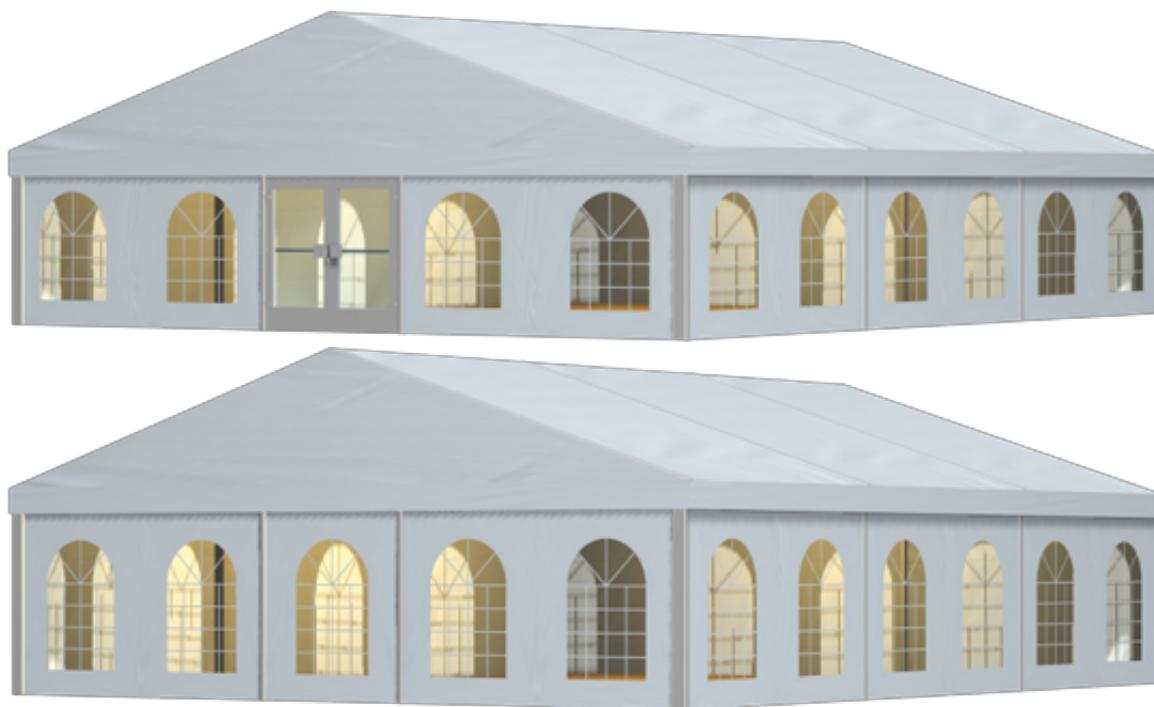

Technical data

| | |
|---------------------------------------|---|
| Clear-span width | 1200 cm |
| Side height | 240 cm, 300 cm |
| Ridge height | 460 cm, 520 cm |
| Roof pitch | 20° |
| Bay distance | 500 cm |
| Gable uprights | 2 gable uprights (per end) |
| Longest component | 660 cm |
| Minimum tent length | 1000 cm |
| Maximum tent length | No limit |
| Main profile | 160 mm x 100 mm x 3 mm |
| Eave / corner connection | Slide connection |
| Max. allowed wind speed to DIN | 100 km/h |
| Wind Load | 0.5 kN/m ² |
| Extension / lean-to options | Extension (max. span 300 cm and 4 bays, located anywhere, not both sides) |
| Flooring options | Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor |
| Cover | RÖDER No. 1: PVC-coated polyester textile, flame |

retardant to DIN 4102 B1, M2

By using compactfloor anchoring can be omitted

Special design

Tent top and side view image

