


Tent image

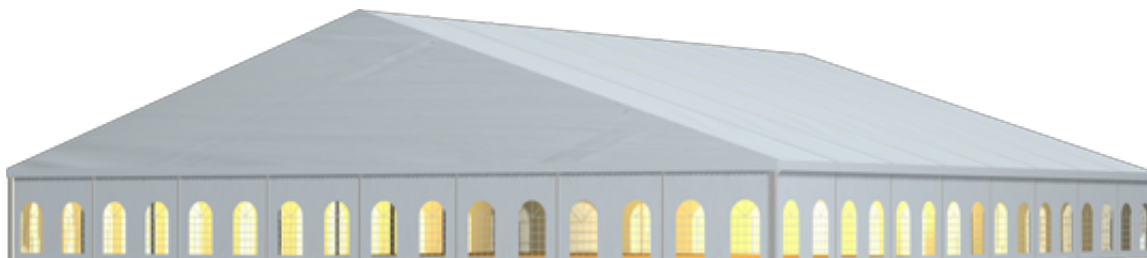

Technical data

Clear-span width	4000 cm
Side height	385 cm
Ridge height	1035 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	7 gable uprights (per end)
Longest component	1148 cm
Minimum tent length	3000 cm
Maximum tent length	No limit
Main profile	285 mm x 124 mm x 7.5/5.2 mm
Eave / corner connection	Clevic-plate connection with corner and ridge strut
Max. allowed wind speed to DIN	130 km/h
Wind Load	0.8 kN/m ²
Extension / lean-to options	none
Flooring options	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

