


Tent image

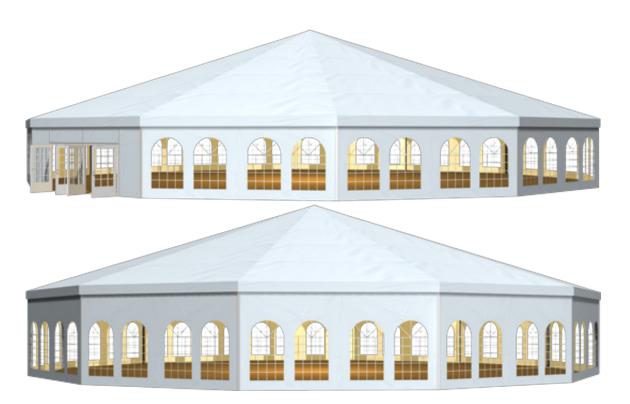

Technical data

Clear-span width Side height Ridge height Side length Roof pitch

Bay distance Main profile Eave / corner connection Covered area Max. allowed wind speed to DIN Wind Load Extension / lean-to options

Flooring options

Cover

3000 cm 300 cm, 400 cm 787 cm, 887 cm 776 cm 18°

1064 cm 250 mm x 120 mm x 5/4 mm Clevic-plate connection with corner strut 675 m² 100 km/h, 130 km/h 0.5 kN/m², 0.8 kN/m² Can also be arranged with intermediate bays (see big tents 3000/300/787 and 3000/400/887) Aluminium cassettefloor with plywood or full aluminiumboards RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2



Tent top and side view image

