


Tent image

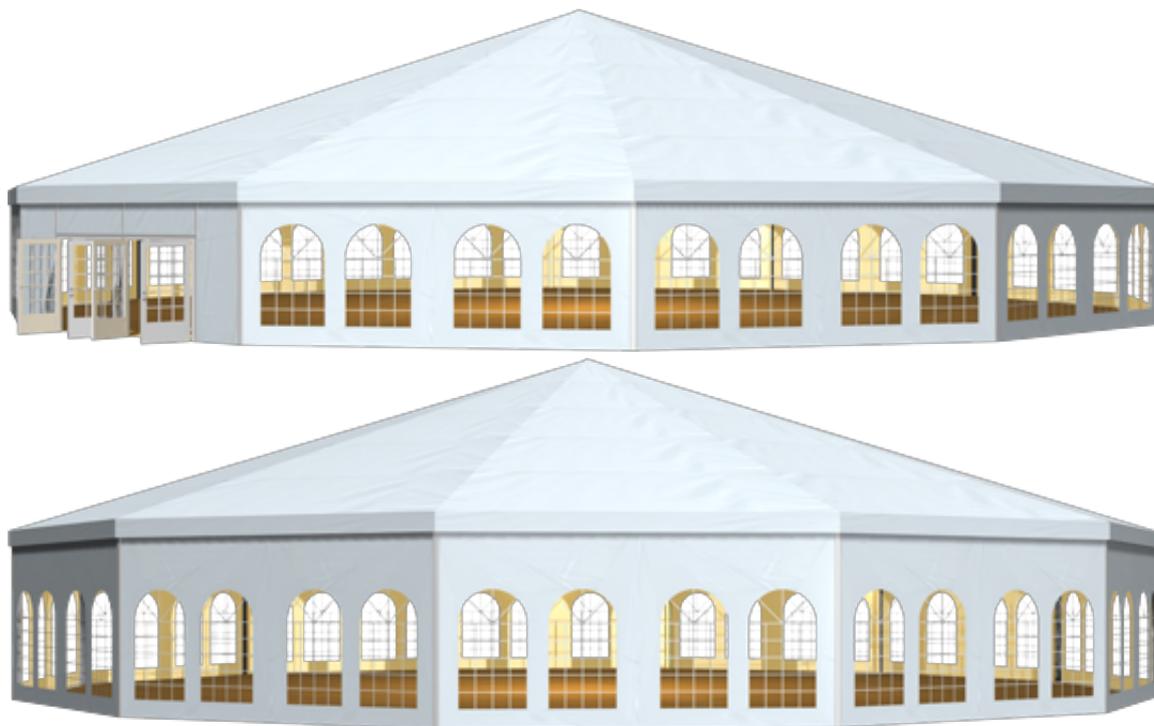

Technical data

<b>Clear-span width</b>	3000 cm
<b>Side height</b>	300 cm, 400 cm
<b>Ridge height</b>	787 cm, 887 cm
<b>Side length</b>	776 cm
<b>Roof pitch</b>	18°
<b>Bay distance</b>	1064 cm
<b>Main profile</b>	250 mm x 120 mm x 5/4 mm
<b>Eave / corner connection</b>	Clevic-plate connection with corner strut
<b>Covered area</b>	675 m <sup>2</sup>
<b>Max. allowed wind speed to DIN</b>	100 km/h, 130 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup> , 0.8 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	Can also be arranged with intermediate bays (see big tents 3000/300/787 and 3000/400/887)
<b>Flooring options</b>	Aluminium cassettefloor with plywood or full aluminiumboards
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

