


Tent image

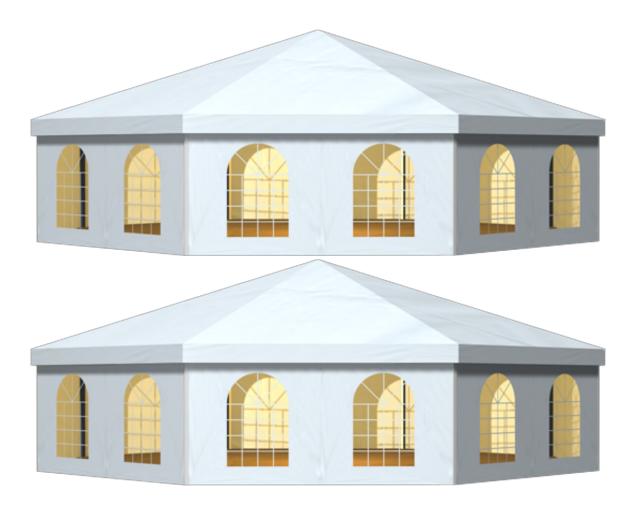

Technical data

Clear-span width Side height Ridge height Side length Roof pitch

Longest component Main profile

Eave / corner connection

Covered area

Max. allowed wind speed to DIN

Wind Load

Extension / lean-to options

Flooring options

Cover

1500 cm

240 cm, 300 cm

480 cm, 540 cm

574 cm 18°

...

790 cm

220 mm x 100 mm x 3 mm

Slide connection

159 m²

100 km/h

 0.5 kN/m^2

Can also be arranged with intermediate bays (see big

tents 1500/240/480 and 1500/300/540)

Aluminium cassettefloor with plywood or full

aluminiumboards Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame


2025-12-07 1/2



Special design

retardant to DIN 4102 B1, M2
By using compactfloor anchoring can be omitted

Tent top and side view image

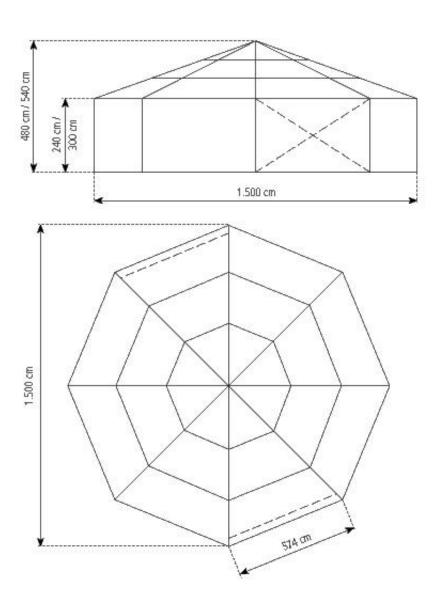

2025-12-07 2 / 2