


Tent image

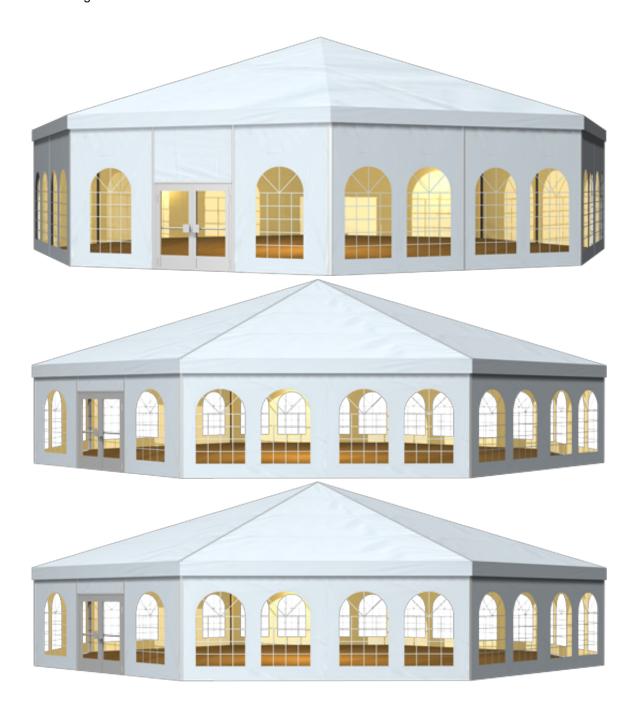

Technical data

Clear-span width Side height Ridge height Side length Roof pitch

2000 cm 240 cm, 300 cm, 400 cm 565 cm, 625 cm, 725 cm 765 cm 18°

1/3 2025-08-21



Longest component

Main profile 220 mm x 100 mm x 3 mm, 220 mm x 100 mm x 4 mm

1060 cm

282.8 m²

100 km/h

Eave / corner connection

Covered area
Max. allowed wind speed to DIN
Wind Load
Extension / lean-to options

0.5 kN/m²
Can also be arranged with intermediate bays (see big

Slide connection with ridge strut, Twin-pin connection

tents 2000/240/565 and 2000/300/625), Can also be arranged with intermediate bays (see big tent

2000/240/725)

Aluminium cassettefloor with plywood or full

aluminiumboards

RÖDER No. 1: PVC-coated polyester textile, flame


retardant to DIN 4102 B1, M2


with corner and ridge strut

Flooring options

Cover

Tent top and side view image

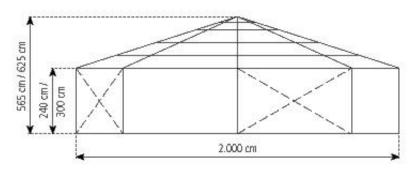

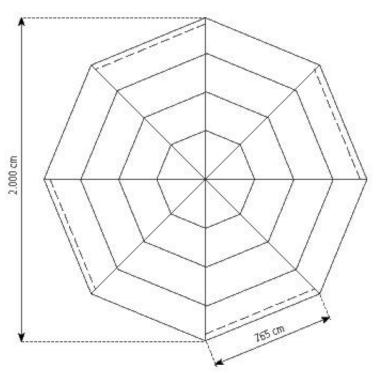

2025-08-21 2 / 3

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2025-08-21