


## Tent image

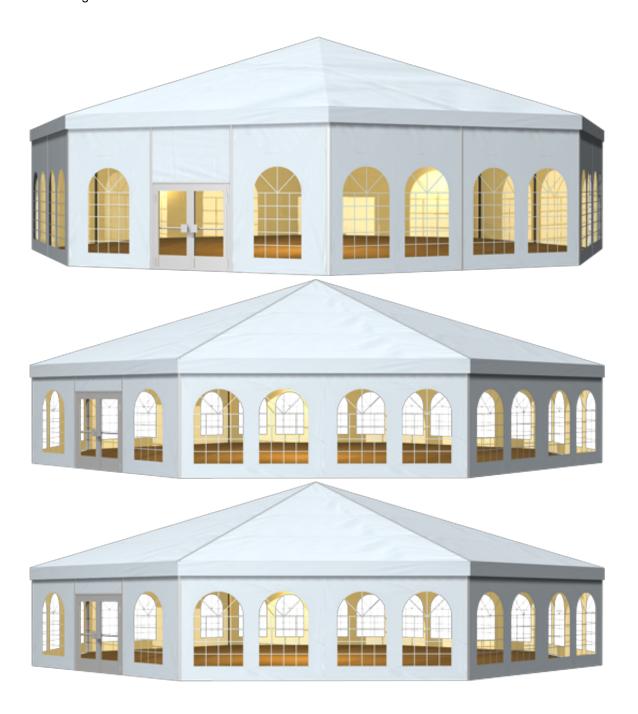

## Technical data

Clear-span width Side height Ridge height Side length Roof pitch

2000 cm 240 cm, 300 cm, 400 cm 565 cm, 625 cm, 725 cm 765 cm 18°

1/3 2025-12-07



Longest component

**Main profile** 220 mm x 100 mm x 3 mm, 220 mm x 100 mm x 4 mm

Eave / corner connection

Covered area
Max. allowed wind speed to DIN
Wind Load
Extension / lean-to options

Flooring options

Cover

Slide connection with ridge strut, Twin-pin connection with corner and ridge strut

282.8 m<sup>2</sup> 100 km/h 0.5 kN/m<sup>2</sup>

1060 cm

Can also be arranged with intermediate bays (see big tents 2000/240/565 and 2000/300/625), Can also be arranged with intermediate bays (see big tent

2000/240/725)


Aluminium cassettefloor with plywood or full


aluminiumboards

RÖDER No. 1: PVC-coated polyester textile, flame

retardant to DIN 4102 B1, M2

## Tent top and side view image

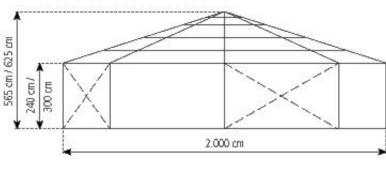

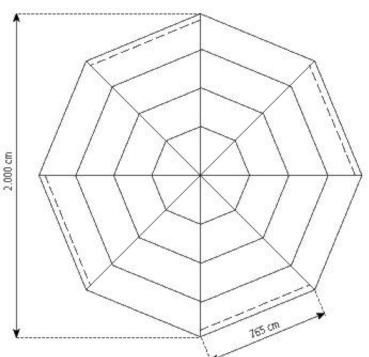

2025-12-07 2 / 3

## RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2025-12-07