


Tent image

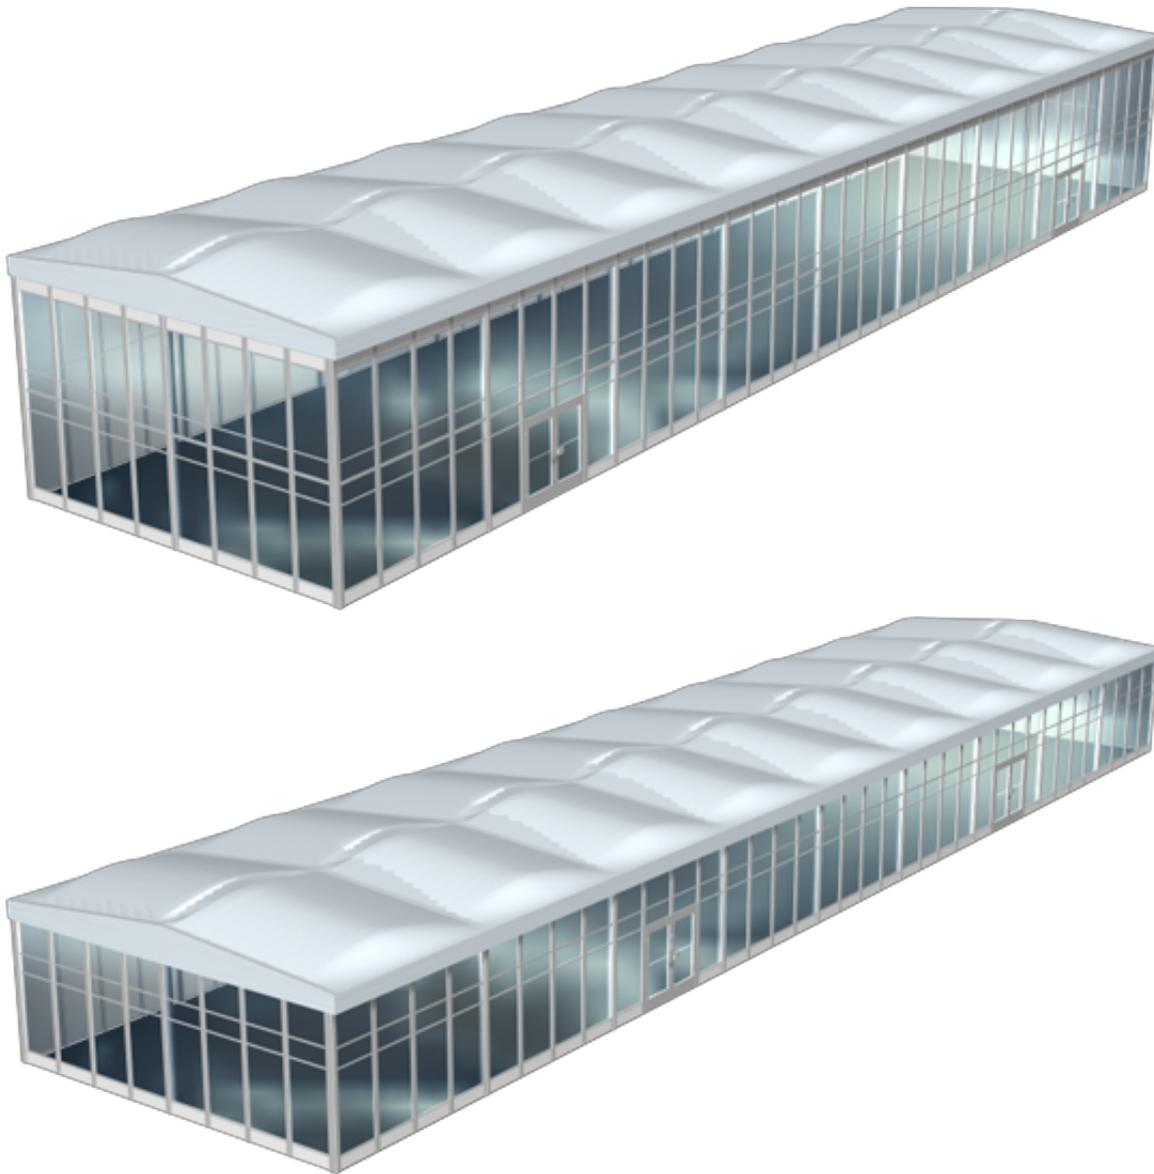

Technical data

<b>Clear-span width</b>	1000 cm
<b>Side height</b>	400 cm, 600 cm
<b>Ridge height</b>	448 cm, 648 cm
<b>Roof pitch</b>	5°
<b>Bay distance</b>	500 cm
<b>Gable uprights</b>	1 gable uprights (per end)
<b>Longest component</b>	552 cm
<b>Minimum tent length</b>	1000 cm

<b>Maximum tent length</b>	No limit
<b>Main profile</b>	250 mm x 120 mm x 5/4 mm
<b>Eave / corner connection</b>	Clevic-plate connection, Clevic-plate connection with corner strut
<b>Max. allowed wind speed to DIN</b>	100 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	none
<b>Flooring options</b>	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2, inflated textile, RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2, inflated textile iso-roof

Tent top and side view image

