


Tent image

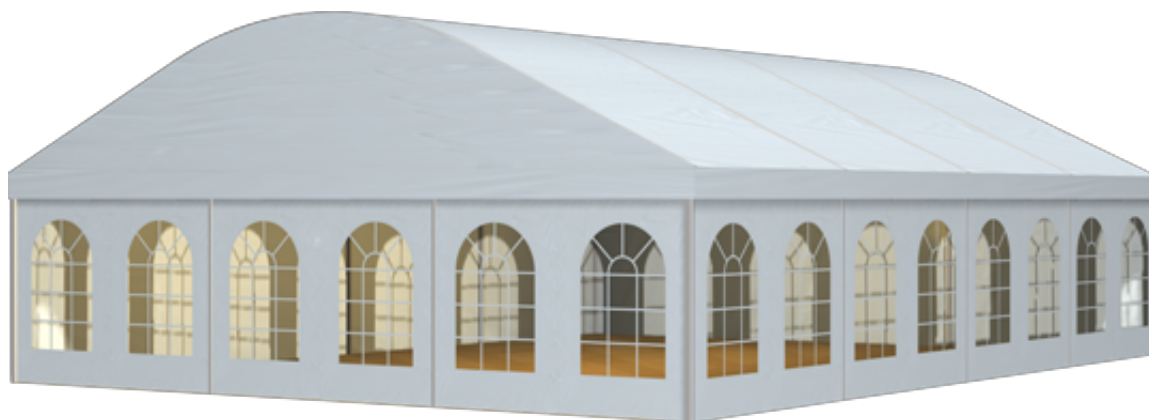

Technical data

<b>Clear-span width</b>	900 cm
<b>Side height</b>	229 cm
<b>Ridge height</b>	397 cm
<b>Roof pitch</b>	25°
<b>Bay distance</b>	300 cm
<b>Gable uprights</b>	2 gable upright (per end)
<b>Longest component</b>	460 cm
<b>Minimum tent length</b>	600 cm
<b>Maximum tent length</b>	No limit
<b>Main profile</b>	81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm )
<b>Eave / corner connection</b>	Internal eave insert
<b>Max. allowed wind speed to DIN</b>	80 km/h
<b>Wind Load</b>	0.3 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	none
<b>Flooring options</b>	Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor
<b>Cover</b>	RRÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
<b>Special design</b>	By using compactfloor or woodenfloor with steel sub-construction and weights anchoring can be omitted Portal beams can be used in place of cross struts

Tent top and side view image

