

Tent image



Technical data

Clear-span width	588 cm
Side height	225 cm
Side length	294 cm
Ridge height pavilion	321 cm
Ridge height membrane	427 cm
Roof pitch	18°
Longest component	367 cm

Main profile 94 mm x 46 mm x 2/4 mm Eave / corner connection Internal eave insert **Covered area** 22.5 m²

Max. allowed wind speed to DIN 80 km/h Wind Load 0.3 kN/m^2

1/4 2025-12-07



Extension / lean-to options

Flooring options

Cover

Special design

Can also be arranged as a pavilion roof with intermediate bays (see party tents Fiesta 0588/225/321,

0800/225/355 and 1000/225/387)


Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame

retardant to DIN 4102 B1, M2


By using compactfloor anchoring can be omitted

Tent top and side view image

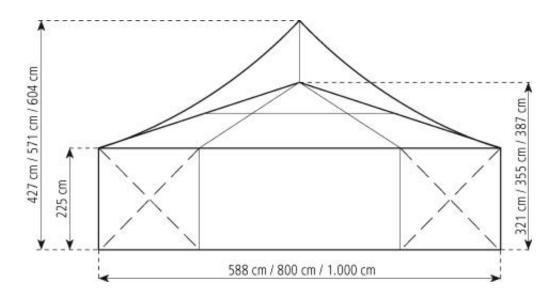

2025-12-07 2/4



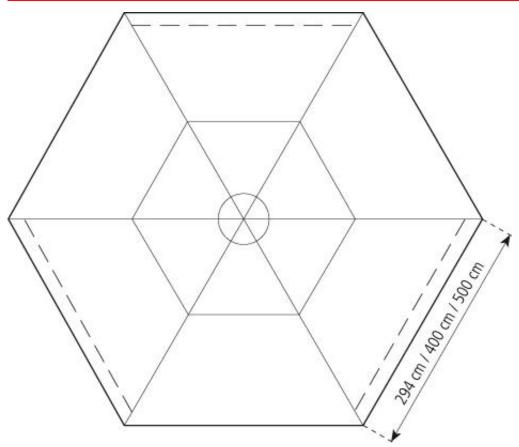

3/4 2025-12-07

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



4/4 2025-12-07