

## Tent image



## Technical data

Clear-span width	588 cm
Side height	225 cm
Side length	294 cm
Ridge height pavilion	321 cm
Ridge height membrane	427 cm
Roof pitch	18°

Longest component 367 cm Main profile 94 mm x 46 mm x 2/4 mm

Eave / corner connection Internal eave insert

**Covered area** 22.5 m<sup>2</sup> Max. allowed wind speed to DIN 80 km/h Wind Load  $0.3 \text{ kN/m}^2$ 

1/4 2025-05-19



Extension / lean-to options

Flooring options

Cover

Special design

Can also be arranged as a pavilion roof with intermediate bays (see party tents Fiesta 0588/225/321,


0800/225/355 and 1000/225/387)

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2


By using compactfloor anchoring can be omitted

## Tent top and side view image

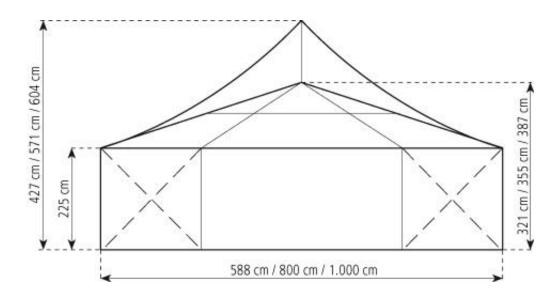

2025-05-19 2/4



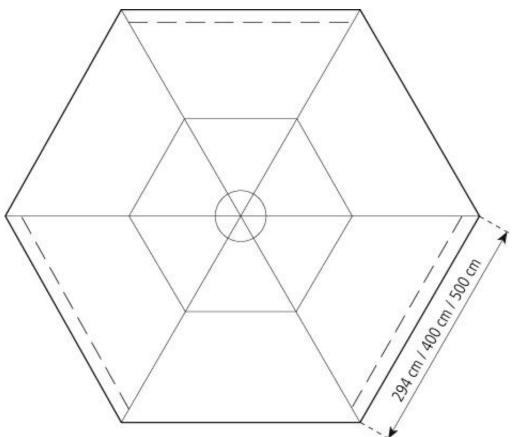

3/4 2025-05-19

## RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



4/4 2025-05-19