

Tent image



Technical data

Clear-span width	500 cm
Side height	225 cm
Side length	250 cm
Ridge height pavilion	306 cm
Ridge height membrane	413 cm
Roof pitch	18°
Longest component	333 cm
Main mafile	0.4 4

Main profile 94 mm x 46 mm x 2/4 mm Eave / corner connection Internal eave insert **Covered area** 16.2 m²

Max. allowed wind speed to DIN 80 km/h Wind Load 0.3 kN/m^2

1/4 2025-08-21



Extension / lean-to options

Can also be arranged as a pavilion roof with intermediate bays (see party tents Fiesta 0400/225/290 and

0500/225/306)

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards

Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame

retardant to DIN 4102 B1, M2


By using compactfloor anchoring can be omitted

Flooring options

Cover


Special design

Tent top and side view image

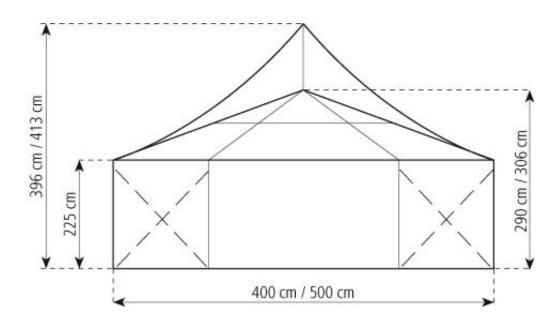

2/4 2025-08-21



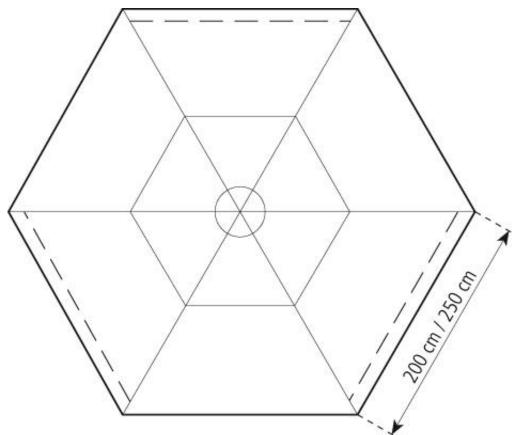

2025-08-21 3/4

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



4/4 2025-08-21