

## Tent image



## Technical data

Ridge height pavilion

Clear-span width	800 cm
Side height	230 cm
•	
Side length	400 cm

Ridge height membrane	560 cm
Roof pitch	18°

Longest component	455 cm
Main profile	110 mm x 68 mm

Main profile	110 mm x 68 mm x 3 mm
Eave / corner connection	Internal eave insert
Covered area	41.6 m <sup>2</sup>

00101044104	
Max. allowed wind speed to DIN	80 km/h
Wind Load	0.3 kN/m <sup>2</sup>

Extension / lean-to options	Can also be arranged as a pavilion roof with intermediate

bays (see party tents Holiday 0800/230/360 and

1000/230/393)

360 cm

1/3 2025-12-07

Flooring options

Cover


Special design

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

By using compactfloor anchoring can be omitted

## Tent top and side view image

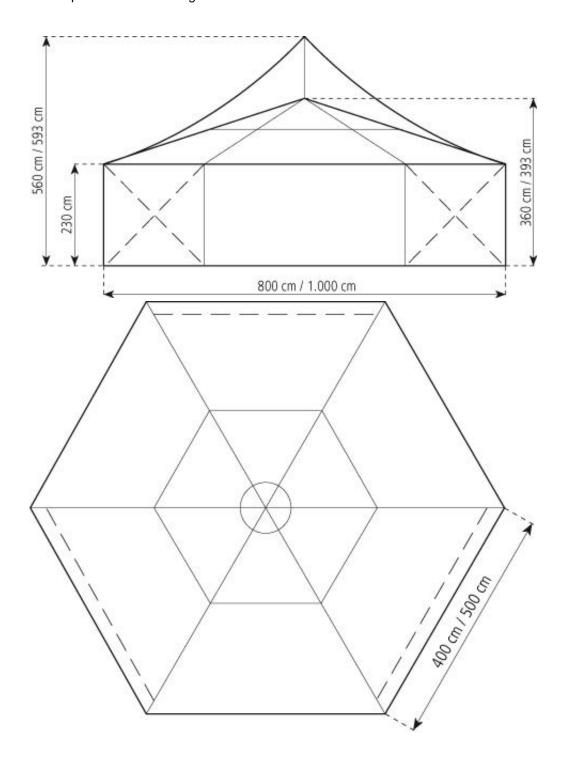

2/3 2025-12-07

## RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2025-12-07