

Tent image



Technical data

Flooring options

Clear-span width	1000 cm
Side height	229 cm

Side length	382 cm
Ridge height pavilion	411 cm

Ridge height membrane	561 cm
Roof pitch	20°

Longest component	540 cm
-------------------	--------

Main profile	8	1 mm x 4	18	mm x 3	3 mm	(opt	tional	94	mm x 48	3 mm x	3
--------------	---	----------	----	--------	------	------	--------	----	---------	---------	---

mm)

Eave / corner connection Internal eave insert

Covered area 70.7 m² Max. allowed wind speed to DIN 80 km/h Wind Load 0.3 kN/m^2

Extension / lean-to options Can also be arranged as a pavilion roof with intermediate

bays (see party tent 1000/229/411)

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards

Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame Cover


retardant to DIN 4102 B1, M2

Special design By using compactfloor anchoring can be omitted

1/2 2025-12-08



Tent top and side view image

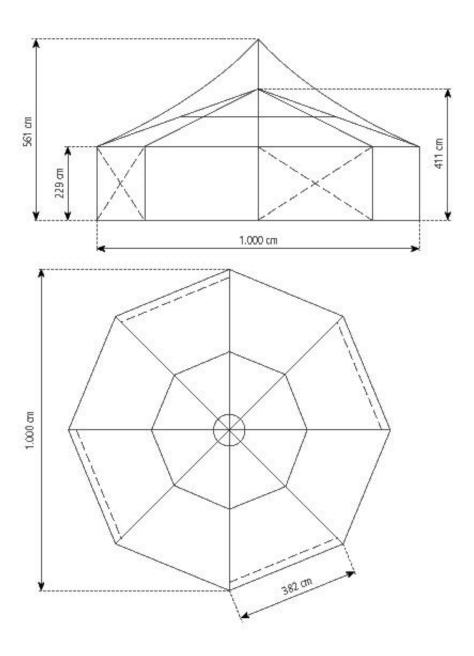

2025-12-08 2 / 2