


Tent image

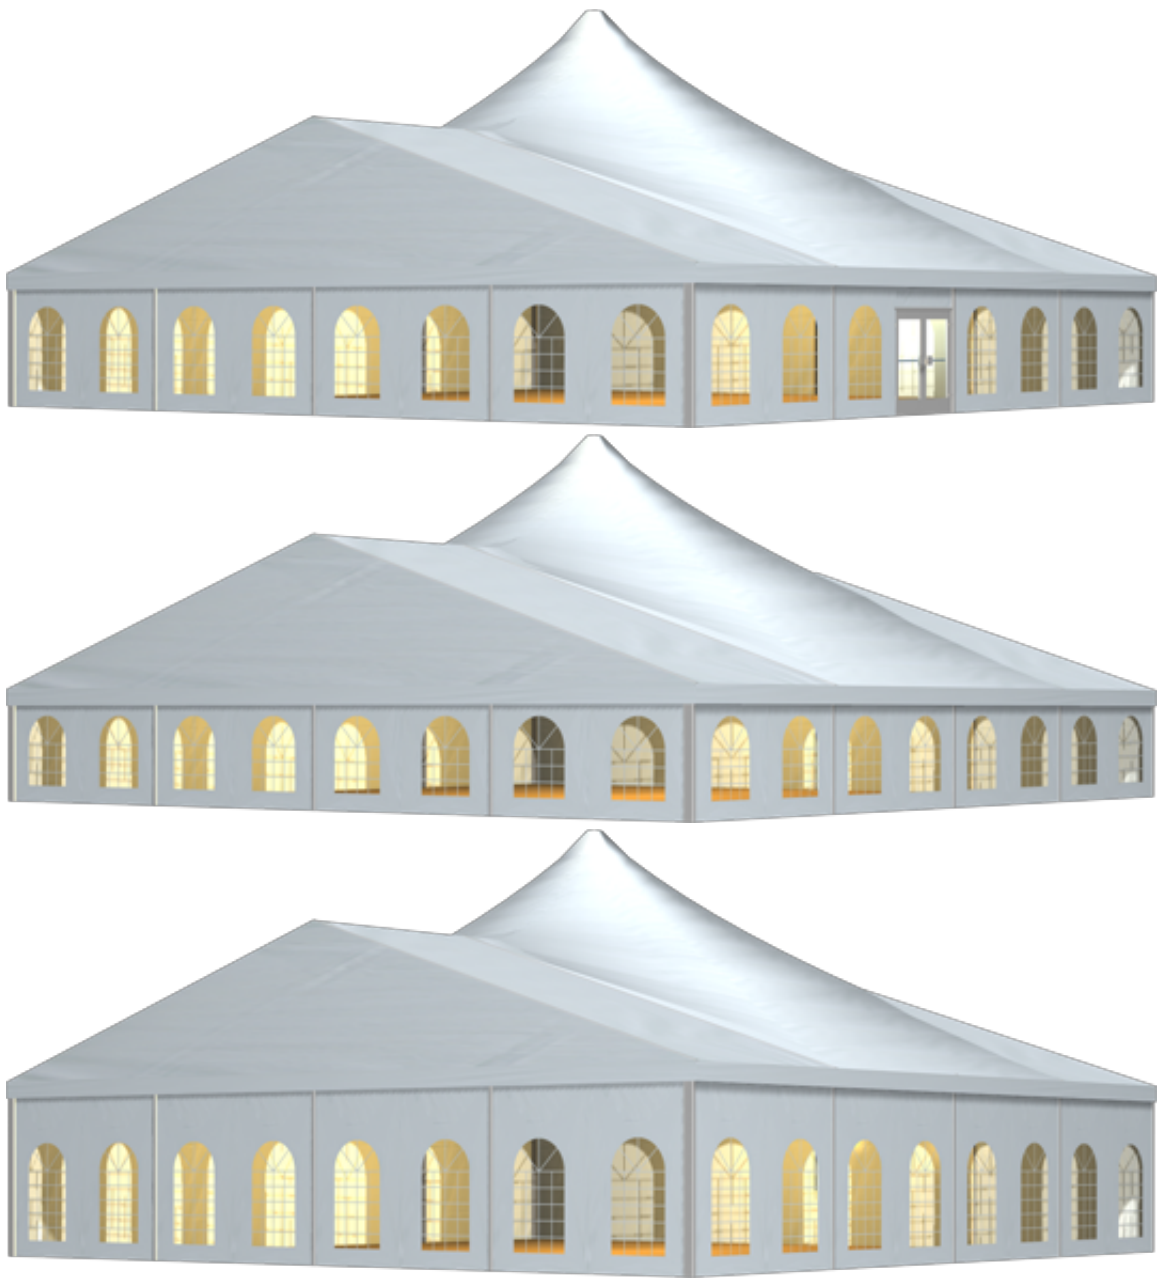

Technical data

|                         |                         |
|-------------------------|-------------------------|
| <b>Clear-span width</b> | 2000 cm                 |
| <b>Side height</b>      | 240 cm, 300 cm, 400 cm  |
| <b>Ridge height</b>     | 565 cm, 625 cm, 725 cm  |
| <b>Highest point</b>    | 860 cm, 920 cm, 1020 cm |
| <b>Roof pitch</b>       | 18°                     |

|                                       |                                                                                                                    |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Bay distance</b>                   | 500 cm                                                                                                             |
| <b>Gable uprights</b>                 | 3 gable uprights (per end)                                                                                         |
| <b>Longest component</b>              | 1070 cm                                                                                                            |
| <b>Minimum tent length</b>            | 4000 cm                                                                                                            |
| <b>Maximum tent length</b>            | No limit                                                                                                           |
| <b>Main profile</b>                   | 220 mm x 100 mm x 3 mm, 220 mm x 100 mm x 4 mm                                                                     |
| <b>Eave / corner connection</b>       | Slide connection with ridge strut, Twin-pin connection with corner and ridge strut                                 |
| <b>Max. allowed wind speed to DIN</b> | 100 km/h                                                                                                           |
| <b>Wind Load</b>                      | 0.5 kN/m <sup>2</sup>                                                                                              |
| <b>Variations</b>                     | 1/2 octagonal at gable end                                                                                         |
| <b>Extension / lean-to options</b>    | 1/2 octagonal at gable end                                                                                         |
| <b>Flooring options</b>               | Woodenfloor with timber and steel sub-construction<br>Aluminium cassettefloor with plywood or full aluminiumboards |
| <b>Cover</b>                          | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2                                      |
| <b>Special design</b>                 | Portal beams can be used in place of cross struts                                                                  |

Tent top and side view image

