


Tent image

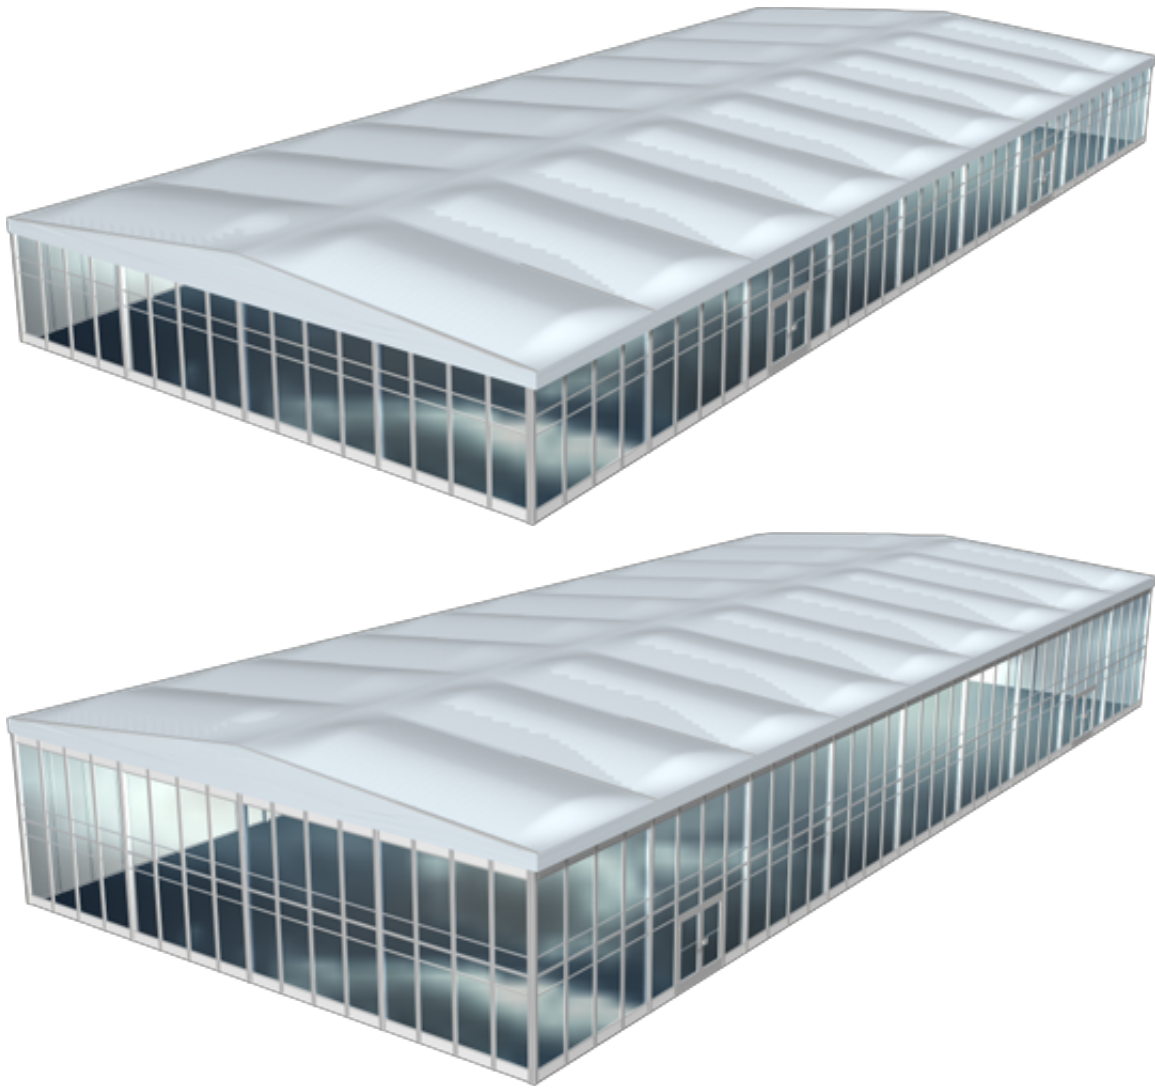

Technical data

Clear-span width	2000 cm
Side height	400 cm, 600 cm
Ridge height	494 cm, 694 cm
Roof pitch	5°
Bay distance	500 cm
Gable uprights	3 gable uprights (per end)
Longest component	1055 cm
Minimum tent length	2000 cm
Maximum tent length	No limit
Main profile	285 mm x 124 mm x 7.5/5.2 mm

Eave / corner connection

Max. allowed wind speed to DIN

Wind Load

Extension / lean-to options

Flooring options

Cover

Clevic-plate connection with corner strut

100 km/h

0.5 kN/m²

none

Woodenfloor with timber and steel sub-construction

Aluminium cassettefloor with plywood or full
aluminiumboards

RÖDER No. 1: PVC-coated polyester textile, flame
retardant to DIN 4102 B1, M2, inflated textile iso-roof

Tent top and side view image

