

Tent image




Technical data

Clear-span width	588 cm
Side height	225 cm
Side length	294 cm
Ridge height pavilion	321 cm
Ridge height membrane	427 cm
Roof pitch	18°
Longest component	367 cm
Main profile	94 mm x 46 mm x 2/4 mm
Eave / corner connection	Internal eave insert
Covered area	22.5 m ²
Max. allowed wind speed to DIN	80 km/h
Wind Load	0.3 kN/m ²



Extension / lean-to options	Can also be arranged as a pavilion roof with intermediate bays (see party tents Fiesta 0588/225/321, 0800/225/355 and 1000/225/387)
Flooring options	Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Special design	By using compactfloor anchoring can be omitted

Tent top and side view image

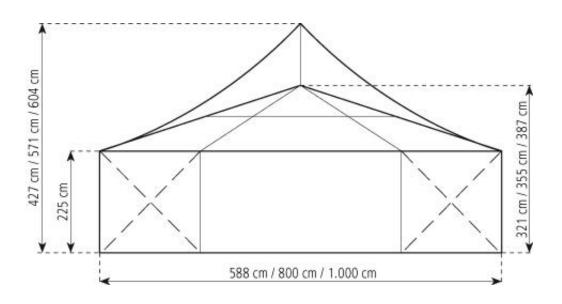

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



