

Tent image



Technical data

Clear-span width	500 cm
Side height	225 cm
Side length	250 cm
Ridge height pavilion	306 cm
Ridge height membrane	413 cm
Roof pitch	18°
Longest component	333 cm

Main profile 94 mm x 46 mm x 2/4 mm

Eave / corner connection Internal eave insert

Covered area 16.2 m² Max. allowed wind speed to DIN 80 km/h Wind Load 0.3 kN/m^2



Extension / lean-to options

Can also be arranged as a pavilion roof with intermediate bays (see party tents Fiesta 0400/225/290 and

0500/225/306)

Flooring options

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor


Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2


Special design

By using compactfloor anchoring can be omitted

Tent top and side view image

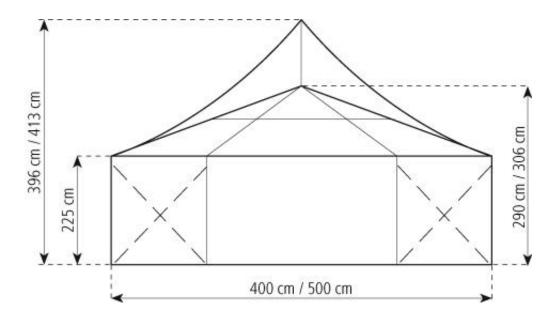



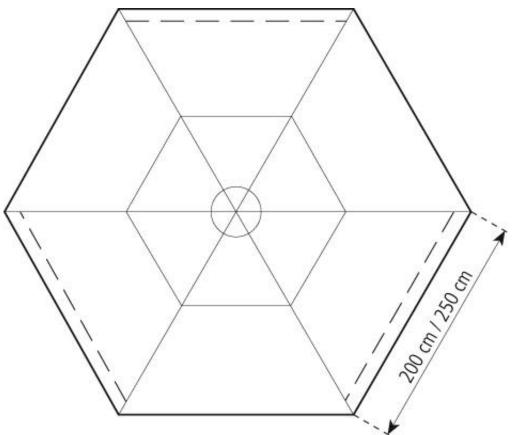

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com

