

Tent image




Technical data

Clear-span width	400 cm
Side height	230 cm
Side length	200 cm
Ridge height pavilion	295 cm
Ridge height membrane	385 cm
Roof pitch	18°



Longest component 296 cm Main profile 110 mm x 68 mm x 3 mm Eave / corner connection Internal eave insert **Covered** area 10.4 m² Max. allowed wind speed to DIN 80 km/h Wind Load 0.3 kN/m² Extension / lean-to options Can also be arranged as a pavilion roof with intermediate bays (see party tents Holiday 0400/230/295 and 0604/230/328) Woodenfloor with steel sub-construction Aluminium **Flooring options** cassettefloor with plywood or full aluminiumboards Compactfloor RÖDER No. 1: PVC-coated polyester textile, flame Cover retardant to DIN 4102 B1, M2 **Special design** By using compactfloor anchoring can be omitted

Tent top and side view image

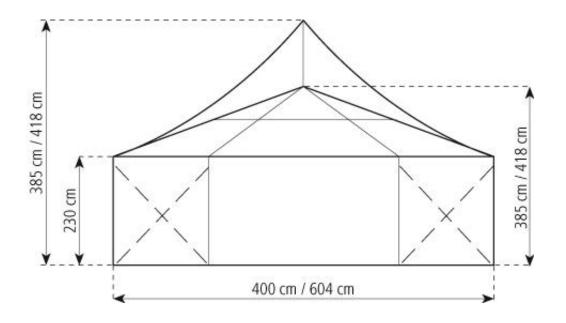

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



