

Tent image



Technical data

Clear-span width	604 cm
Side height	230 cm
Side length	302 cm
Ridge height pavilion	328 cm

Ridge height membrane	418 cm
Roof pitch	18°

Longest component	372 cm
Main profile	110 mm x 68 mm x 3 mm
Eave / corner connection	Internal eave insert
Covered area	23.7 m ²

0010104 4104	
Max. allowed wind speed to DIN	80 km/h
Wind Load	0.3 kN/m ²

Extension / lean-to options	Can also be arranged as a pavilion roof with intermediate
	have (and party tente Holiday 0400/220/205 and

bays (see party tents Holiday 0400/230/295 and

0604/230/328)

1/3 2024-05-05

Flooring options

Cover


Special design

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

By using compactfloor anchoring can be omitted

Tent top and side view image

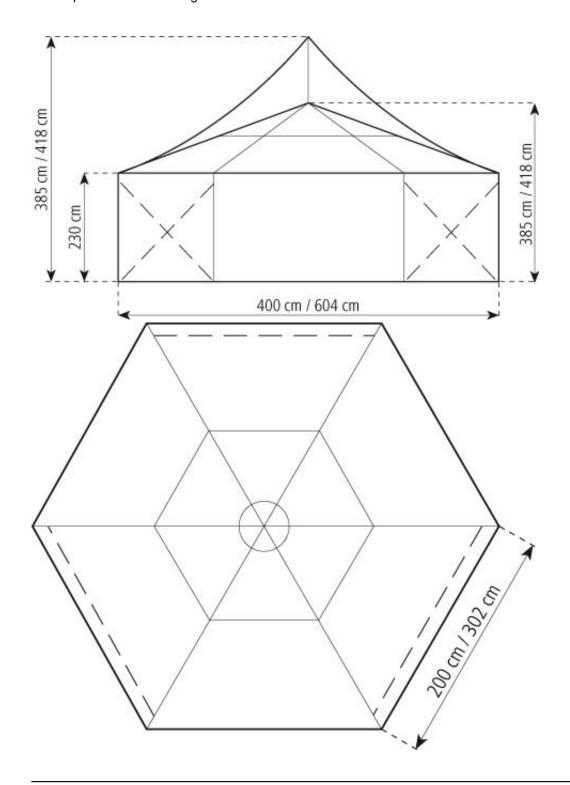

2/3 2024-05-05

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2024-05-05