

Tent image



Technical data

Flooring options

| Clear-span width | 900 cm |
|------------------|--------|
| Side height | 229 cm |

| Ridge height | 389 cm |
|--------------|--------|
|--------------|--------|

| Highest point | 566 cm |
|---------------|--------|
| Roof pitch | 20° |

| Bay | distance | 300 cm |
|-----|----------|--------|
|-----|----------|--------|

| Gable uprights | 1 gable upright (per end) |
|----------------|---------------------------|
| | |

Longest component 481 cm Minimum tent length As shown **Maximum tent length** No limit

Main profile 81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3

mm)

Eave / corner connection Internal eave insert

Max. allowed wind speed to DIN 80 km/h **Wind Load** 0.3 kN/m^2

Extension / lean-to options 1/2 hexagonal at gable end With Mega tents 6m and 8m

> Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full

aluminiumboards Compactfloor


1/2 2024-04-30

Cover

Note

Spanning the world. RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2 All Mega variations fit 6m, 8m and 9m standard party tents

Tent top and side view image

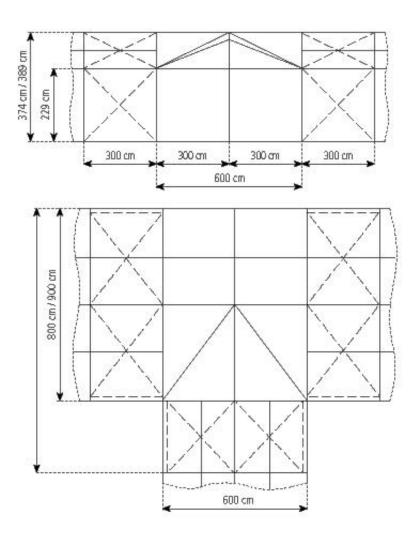

2/2 2024-04-30