


Tent image

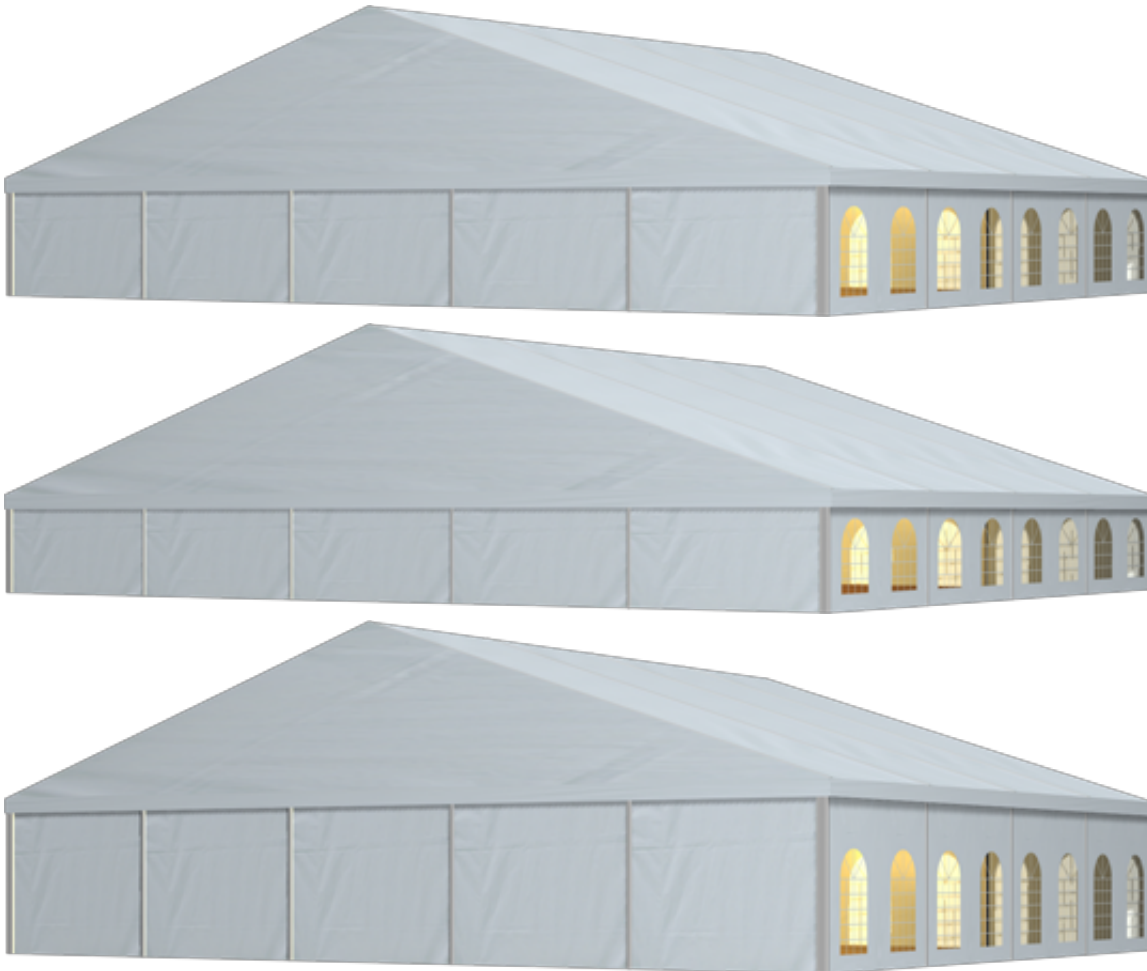

Technical data

Clear-span width	2500 cm
Side height	240 cm, 300 cm, 400 cm
Ridge height	640 cm, 700 cm, 800 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	4 gable uprights (per end)
Longest component	1325 cm, 1070 cm
Minimum tent length	2000 cm
Maximum tent length	No limit
Main profile	220 mm x 100 mm x 4 mm, 250 mm x 120 mm x 5/4 mm
Eave / corner connection	Twin-pin connection with corner and ridge strut, Clevic-plate connection with corner and ridge strut
Max. allowed wind speed to DIN	100 km/h, 130 km/h

Wind Load

0.5 kN/m², 0.8 kN/m²

Extension / lean-to options

Extension (max. span 400 cm, located anywhere, both sides, any length) 1/2 Decagonal at gable end, Extension (max. span 500 cm located anywhere, both sides, any length)

Flooring options

Woodenfloor with timber and steel sub-construction
 Aluminium cassettefloor with plywood or full aluminiumboards

Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Spars with site joint permit the construction of a 15 m or 20 m tent with the same frame components Portal beams can be used in place of cross struts

Tent top and side view image

