


Tent image

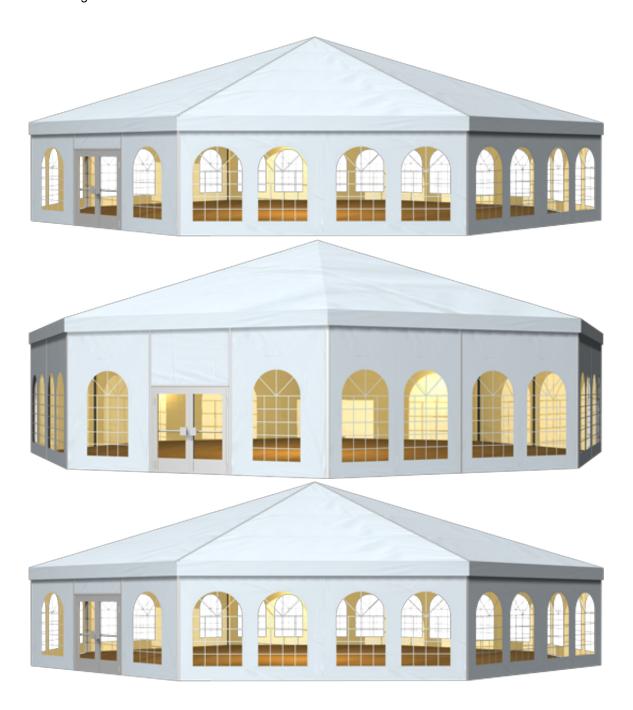

Technical data

Clear-span width Side height Ridge height Side length Roof pitch

2000 cm 240 cm, 300 cm, 400 cm 565 cm, 625 cm, 725 cm 765 cm 18°

1/3 2024-05-13



Longest component Main profile

profile 220 mm x 100 mm x 3 mm, 220 mm x 100 mm x 4 mm

1060 cm

Eave / corner connection

Covered area
Max. allowed wind speed to DIN
Wind Load
Extension / lean-to options

Extension / lean-to options

Flooring options

Cover

220 11111 X 100 11111 X 3 11111, 220 11111 X 100 11111 X 4 111

Slide connection with ridge strut, Twin-pin connection with corner and ridge strut

282.8 m² 100 km/h 0.5 kN/m²

Can also be arranged with intermediate bays (see big tents 2000/240/565 and 2000/300/625), Can also be arranged with intermediate bays (see big tent

2000/240/725)


Aluminium cassettefloor with plywood or full


aluminiumboards

RÖDER No. 1: PVC-coated polyester textile, flame

retardant to DIN 4102 B1, M2

Tent top and side view image

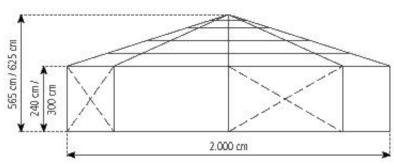

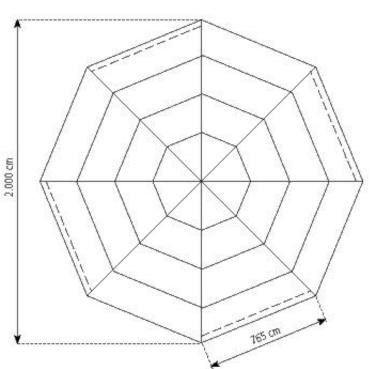

2024-05-13 2 / 3

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2024-05-13