

Tent image



Technical data

Clear-span width	800 cm
Side height	225 cm

Side length	400 cm
Ridge height pavilion	355 cm

Ridge height membrane	571 cm
Roof pitch	18°

Longest compone	ent 457	cm
-----------------	---------	----

Main profile	94 mm x 46 mm x 2/4 mm
Face / assumes assumention	Internal serie becaut

Internal eave insert	
	Internal eave insert

Covered area	41.6 1112
Max. allowed wind speed to DIN	80 km/h
Wind Load	0.3 kN/m ²

Extension / lean-to options	Can also be arranged as a pavilion roof with intermediate
-----------------------------	---

bays (see party tents Fiesta 0588/225/321,

0800/225/355 and 1000/225/387)

Flooring options Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards

1/3 2024-05-12



Cover


Special design

Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

By using compactfloor anchoring can be omitted

Tent top and side view image

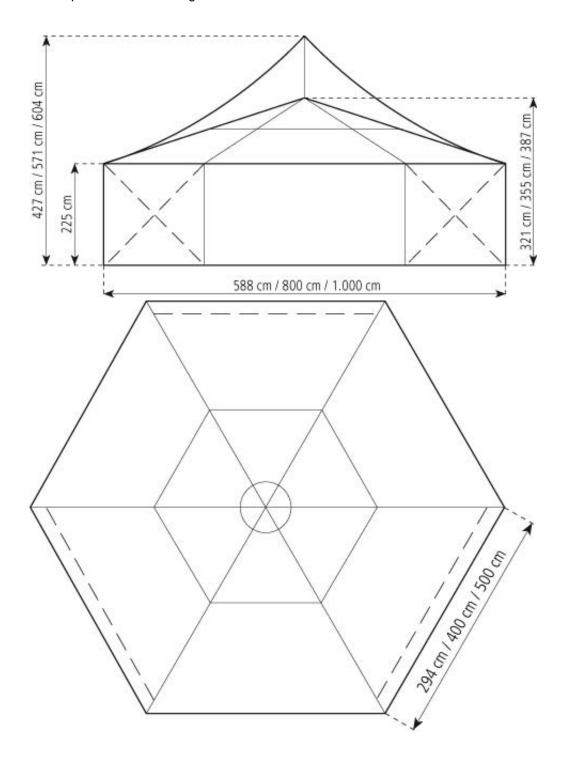

2/3 2024-05-12

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2024-05-12