

Tent image



Technical data

| Clear-span width Side height | 604 cm 230 cm |
|------------------------------|------------------|
| | |
| Side length | 302 cm |
| Ridge height pavilion | 328 cm |
| | |
| Ridge height membrane | 418 cm |

Roof pitch 18°

| Longest component | 3/2 cm |
|--------------------------|-----------------------|
| Main profile | 110 mm x 68 mm x 3 mm |
| Eave / corner connection | Internal eave insert |
| Covered area | 23.7 m ² |

Max. allowed wind speed to DIN 80 km/h Wind Load 0.3 kN/m^2

Extension / lean-to options Can also be arranged as a pavilion roof with intermediate

bays (see party tents Holiday 0400/230/295 and

0604/230/328)

1/3 2024-05-13



Flooring options

Cover


Special design

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

By using compactfloor anchoring can be omitted

Tent top and side view image

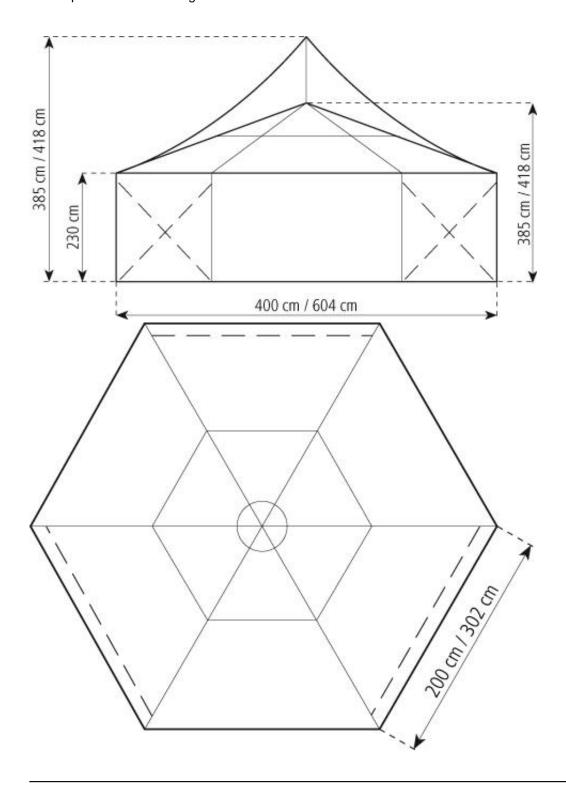

2/3 2024-05-13

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2024-05-13