

Tent image



Technical data

| Clear-span width | 800 cm |
|------------------|--------|
| Side height | 230 cm |
| Side length | 400 cm |

| Ridge height pavilion | 360 cm |
|-----------------------|--------|
| | |

| Ridge height membrane | 560 cm |
|-----------------------|--------|
| Roof pitch | 18° |

| Longest component | 455 cm |
|-------------------|--------|
|-------------------|--------|

| Main profile | 110 mm x 68 mm x 3 mm |
|--------------------------|-----------------------|
| Eave / corner connection | Internal cave incert |

| Eave / corner connection | internal eave insert |
|--------------------------|----------------------|
| Covered area | 41.6 m² |
| | |

| Max. allowed wind speed to DIN | 80 km/h |
|--------------------------------|----------------------|
| Wind Load | 0.3 kN/m^2 |

| Extension / lean-to options | Can also be arranged as a pavilion roof with intermediate |
|-----------------------------|---|
|-----------------------------|---|

bays (see party tents Holiday 0800/230/360 and 1000/230/393)

1/3 2024-05-12



Flooring options

Cover


Special design

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

By using compactfloor anchoring can be omitted

Tent top and side view image

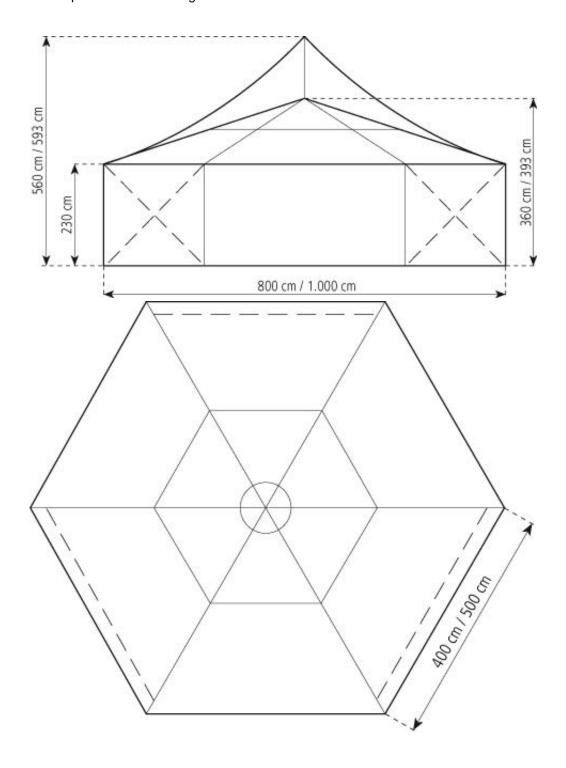

2/3 2024-05-12

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2024-05-12