


Tent image

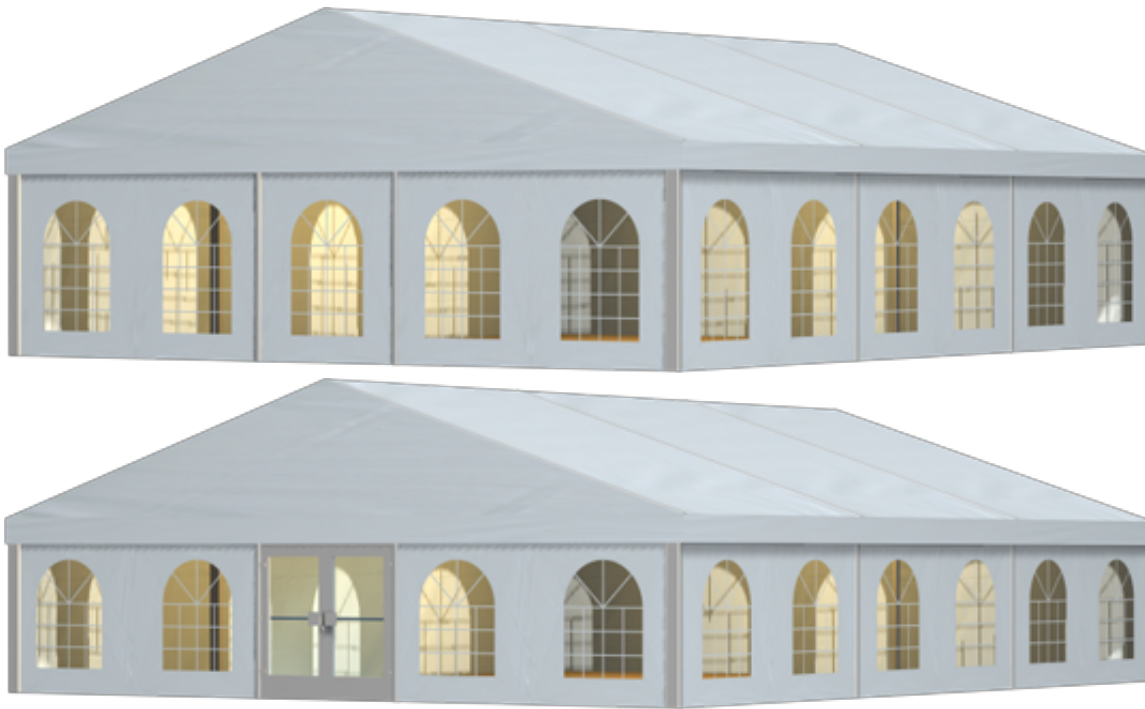

Technical data

Clear-span width	1200 cm
Side height	240 cm, 300 cm
Ridge height	460 cm, 520 cm
Roof pitch	20°
Bay distance	500 cm
Gable uprights	2 gable uprights (per end)
Longest component	660 cm
Minimum tent length	1000 cm
Maximum tent length	No limit
Main profile	160 mm x 100 mm x 3 mm
Eave / corner connection	Slide connection
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m ²
Extension / lean-to options	Extension (max. span 300 cm and 4 bays, located anywhere, not both sides)
Flooring options	Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor
Cover	RÖDER No. 1: PVC-coated polyester textile, flame

Special design

retardant to DIN 4102 B1, M2
By using compactfloor anchoring can be omitted

Tent top and side view image

