


Tent image



Technical data

Clear-span width Side height Ridge height Side length Roof pitch 2000 cm 240 cm, 300 cm, 400 cm 565 cm, 625 cm, 725 cm 765 cm 18°

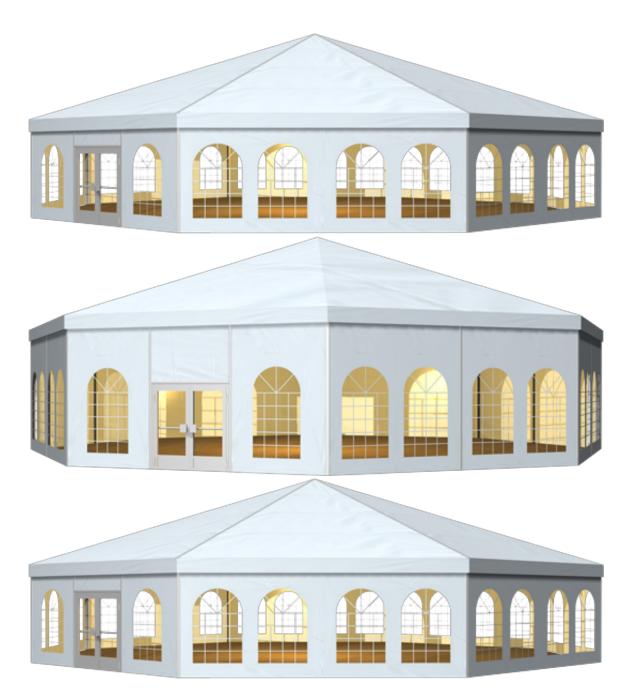

Longest component Main profile

Eave / corner connection

Covered area Max. allowed wind speed to DIN Wind Load Extension / lean-to options

Flooring options

Cover

1060 cm 220 mm x 100 mm x 3 mm, 220 mm x 100 mm x 4 mm Slide connection with ridge strut, Twin-pin connection with corner and ridge strut 282.8 m² 100 km/h 0.5 kN/m² Can also be arranged with intermediate bays (see big tents 2000/240/565 and 2000/300/625), Can also be arranged with intermediate bays (see big tent 2000/240/725) Aluminium cassettefloor with plywood or full aluminiumboards RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

