


Tent image

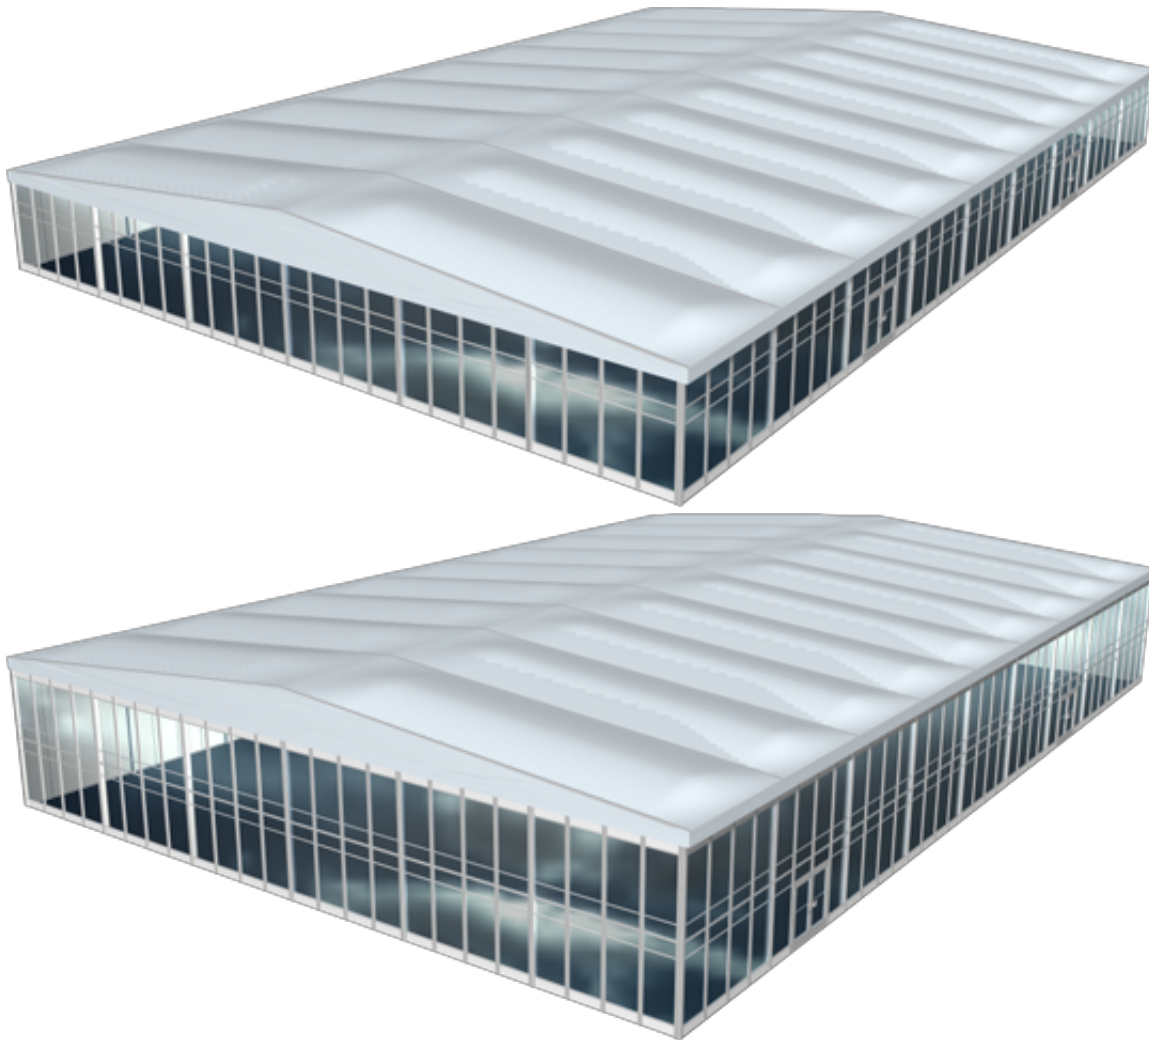

Technical data

Clear-span width	3000 cm
Side height	400 cm, 600 cm
Ridge height	534 cm, 734 cm
Roof pitch	5°
Bay distance	500 cm
Gable uprights	5 gable uprights (per end)
Longest component	1055 cm
Minimum tent length	2000 cm
Maximum tent length	No limit
Main profile	285 mm x 124 mm x 7.5/5.2 mm
Eave / corner connection	Clevic-plate connection with corner strut

Max. allowed wind speed to DIN

100 km/h

Wind Load

0.5 kN/m²

Extension / lean-to options

none

Flooring options

Woodenfloor with timber and steel sub-construction
 Aluminium cassettefloor with plywood or full
 aluminiumboards

Cover

RÖDER No. 1: PVC-coated polyester textile, flame
 retardant to DIN 4102 B1, M2, inflated textile iso-roof

Tent top and side view image

