

Tent image



Technical data

Clear-span width	1000 cm
Side height	225 cm

Side length	500 cm
Ridge height pavilion	387 cm

Ridge height membrane	604 cm
Roof pitch	18°

Longest component	546 cm

Main	profile		94 r	mm x 46	3 mm x 2/4	mm
	_	_				

Eave / corner connection Internal eave insert

Covered area 65 m² Max. allowed wind speed to DIN 80 km/h Wind Load 0.3 kN/m^2

Extension / lean-to options Can also be arranged as a pavilion roof with intermediate

bays (see party tents Fiesta 0588/225/321,

0800/225/355 and 1000/225/387)

Flooring options Woodenfloor with steel sub-construction Aluminium

cassettefloor with plywood or full aluminiumboards

1/3 2024-05-20



Cover


Special design

Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

By using compactfloor anchoring can be omitted

Tent top and side view image

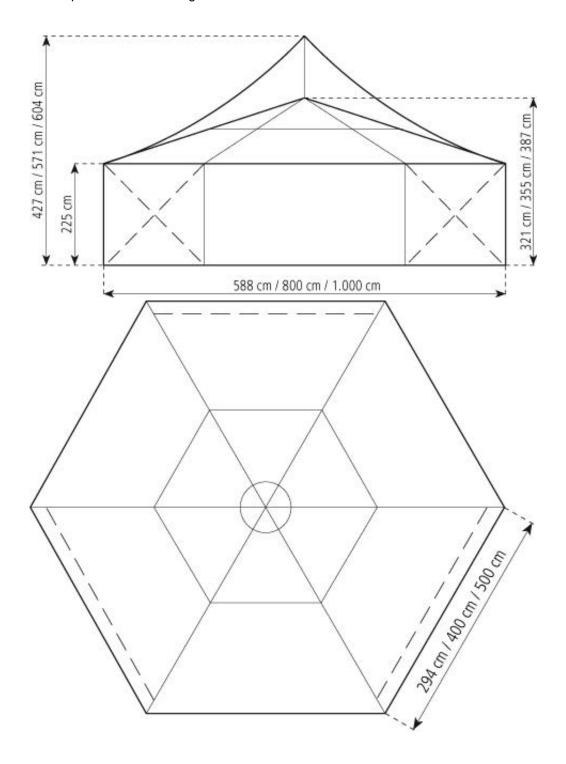

2/3 2024-05-20

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2024-05-20