

Tent image



Technical data

Clear-span width	400 cm
Side height	230 cm
Side length	200 cm
Ridge height pavilion	295 cm
Ridge height membrane	385 cm
Roof pitch	18°

1/4 2024-05-20



Longest component

Main profile

Eave / corner connection

Covered area

Max. allowed wind speed to DIN

Wind Load

Extension / lean-to options

Flooring options

Cover

Special design

296 cm

110 mm x 68 mm x 3 mm

Internal eave insert

10.4 m²

80 km/h

0.3 kN/m²

Can also be arranged as a pavilion roof with intermediate

bays (see party tents Holiday 0400/230/295 and

0604/230/328)

Woodenfloor with steel sub-construction Aluminium

cassettefloor with plywood or full aluminiumboards


Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame

retardant to DIN 4102 B1, M2


By using compactfloor anchoring can be omitted

Tent top and side view image

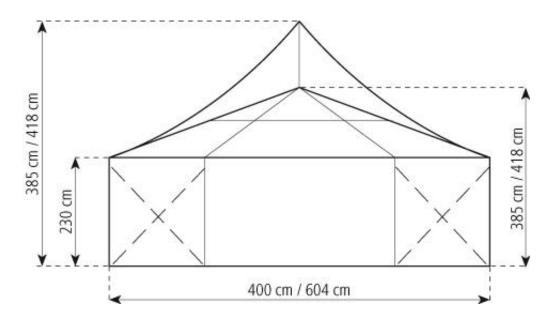

2024-05-20 2 / 4



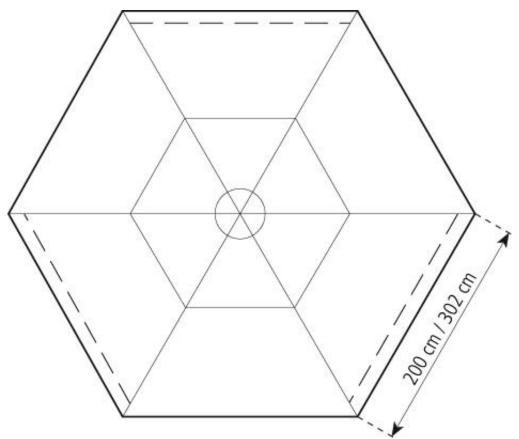

3/4 2024-05-20

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



4/4 2024-05-20