

## Tent image



## Technical data

Clear-span width	1000 cm
Side height	229 cm

Side length	382 cm
Ridge height pavilion	411 cm

Ridge height membrane	561 cm
Roof pitch	20°

Longest component	540 cm

Main profile	81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3
	· ·

mm)

Eave / corner connection Internal eave insert

**Covered area** 70.7 m<sup>2</sup> Max. allowed wind speed to DIN 80 km/h Wind Load  $0.3 \text{ kN/m}^2$ 

Can also be arranged as a pavilion roof with intermediate Extension / lean-to options

bays (see party tent 1000/229/411)

Woodenfloor with steel sub-construction Aluminium Flooring options

cassettefloor with plywood or full aluminiumboards

Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame Cover


retardant to DIN 4102 B1, M2

Special design By using compactfloor anchoring can be omitted

1/2 2024-05-20



## Tent top and side view image

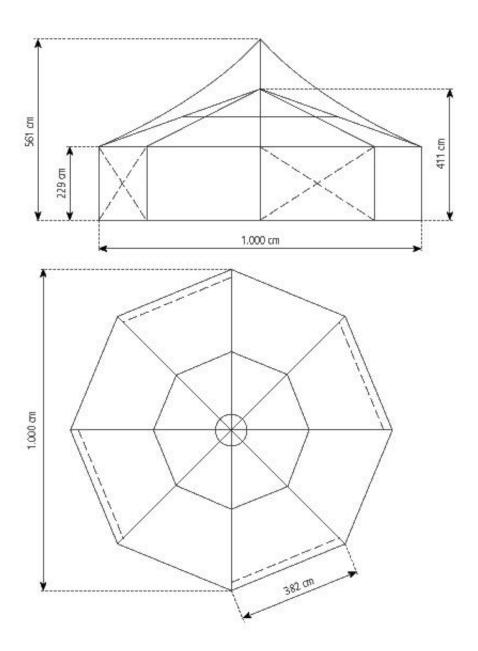

2024-05-20 2 / 2