


Tent image

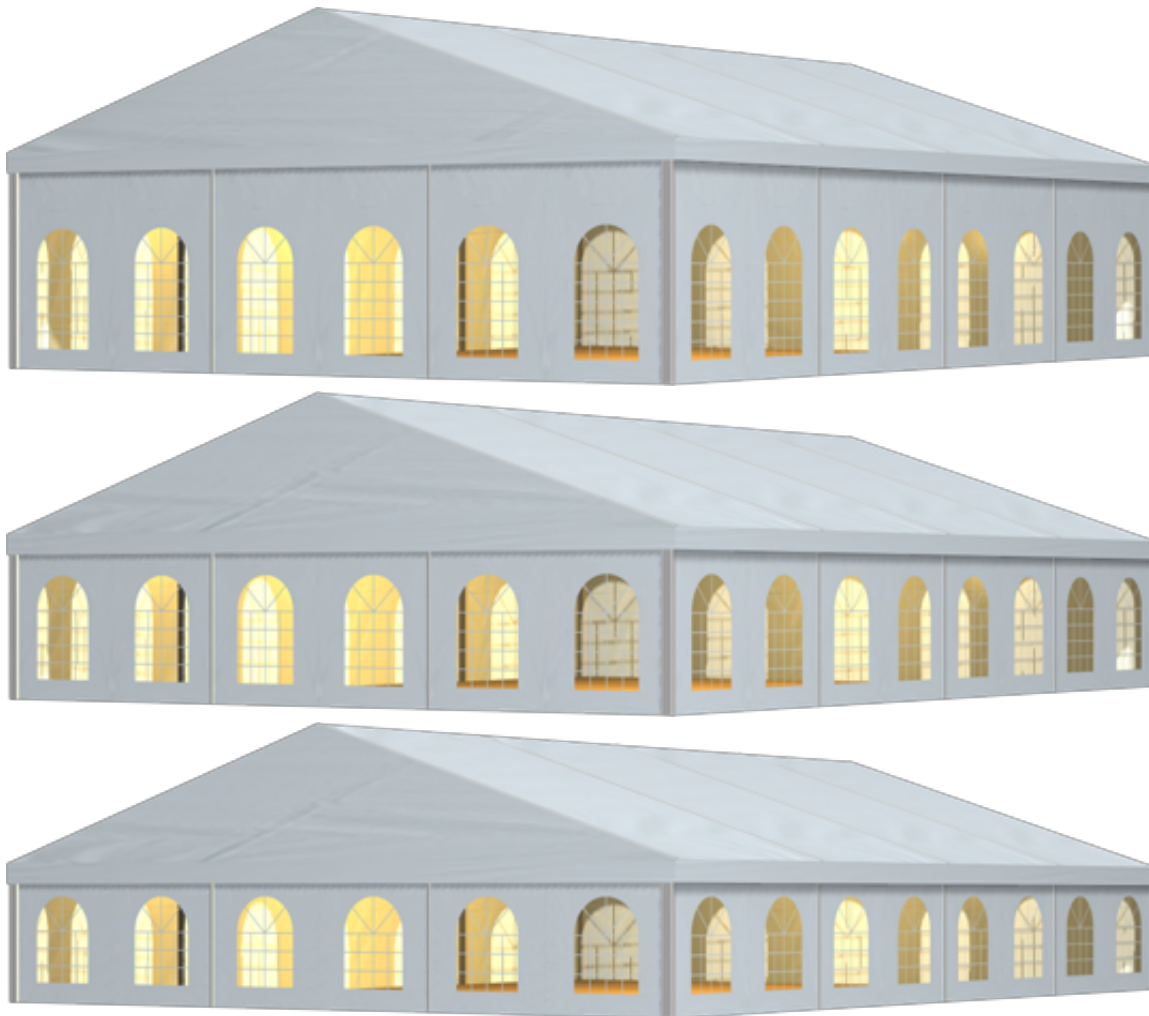

Technical data

<b>Clear-span width</b>	1500 cm
<b>Side height</b>	240 cm, 300 cm, 400 cm
<b>Ridge height</b>	480 cm, 540 cm, 640 cm
<b>Roof pitch</b>	18°
<b>Bay distance</b>	500 cm
<b>Gable uprights</b>	2 gable uprights (per end)
<b>Longest component</b>	800 cm
<b>Minimum tent length</b>	1000 cm
<b>Maximum tent length</b>	No limit
<b>Main profile</b>	220 mm x 100 mm x 3 mm
<b>Eave / corner connection</b>	Slide connection, Twin-pin connection with corner strut
<b>Max. allowed wind speed to DIN</b>	100 km/h

**Wind Load**

0.5 kN/m<sup>2</sup>

**Extension / lean-to options**

Extension (max. span 400 cm, located anywhere, both sides, any length) 1/2 octagonal at gable end, Extension (max. span 500 cm located anywhere, both sides, any length)

**Flooring options**

Woodenfloor with timber or steel sub-construction  
 Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor

**Cover**

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

**Special design**

Portal beams can be used in place of cross struts By using compactfloor anchoring can be omitted, Portal beams can be used in place of cross struts

Tent top and side view image

