


Tent image

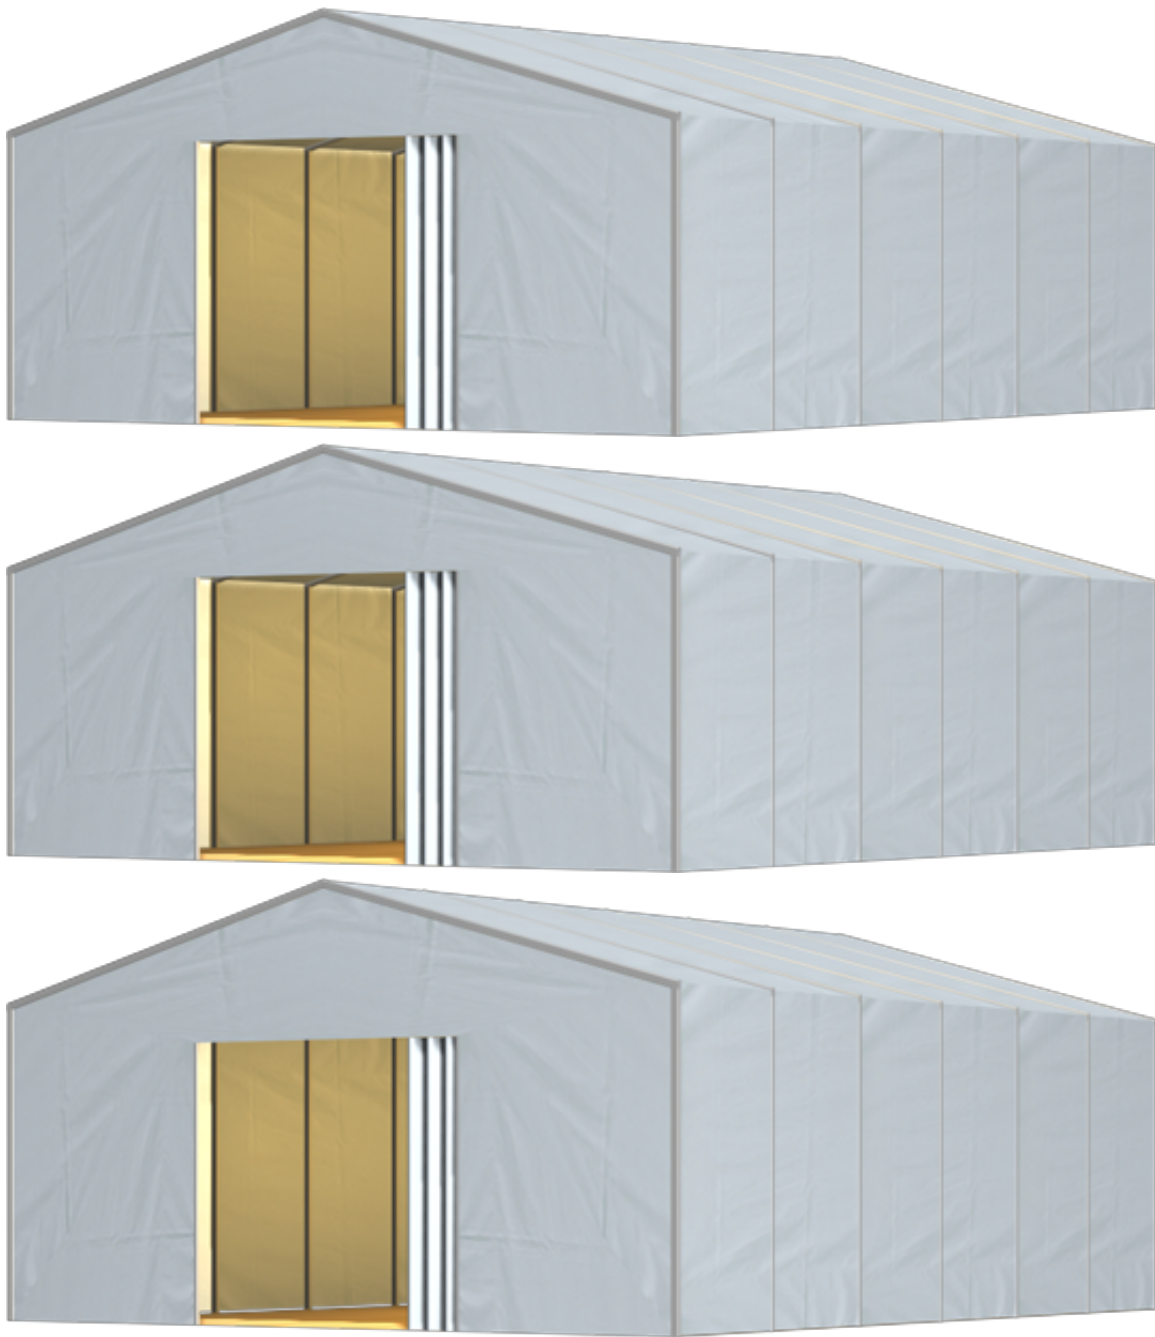

Technical data

Clear-span width	1250 cm
Side height	350 cm, 440 cm, 500 cm
Ridge height	518 cm, 608 cm, 677 cm
Roof pitch	15°

Bay distance	250 cm
Gable uprights	2 gable uprights (per end)
Longest component	656 cm
Minimum tent length	1000 cm, 750 cm
Maximum tent length	No limit
Main profile	170 mm x 88 mm x 3 mm
Door sizes (PVC door panels)	Profile 170 x 88 x 3 mm: Side wall 220 cm / 450 cm x 300 cm Gable end 450 cm x 390 cm Profile 220 x 100 x 3 mm: Side wall 220 cm x 300 cm Gable end 450 cm x 390 cm, Side wall 220 cm / 450 cm x 450 cm Gable end 450 cm x 430 cm
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.2 kN/m ² , 0.5 kN/m ²
Snow load	0.25 kN/m ²
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Special design	Sliding doors, rolling doors or service entrances Trapezoidal metal sheets Snow load 0.25 kN/m ² : Movable system on rollers, Sliding doors, rolling doors or service entrances Trapezoidal metal sheets

Tent top and side view image

