


Tent image

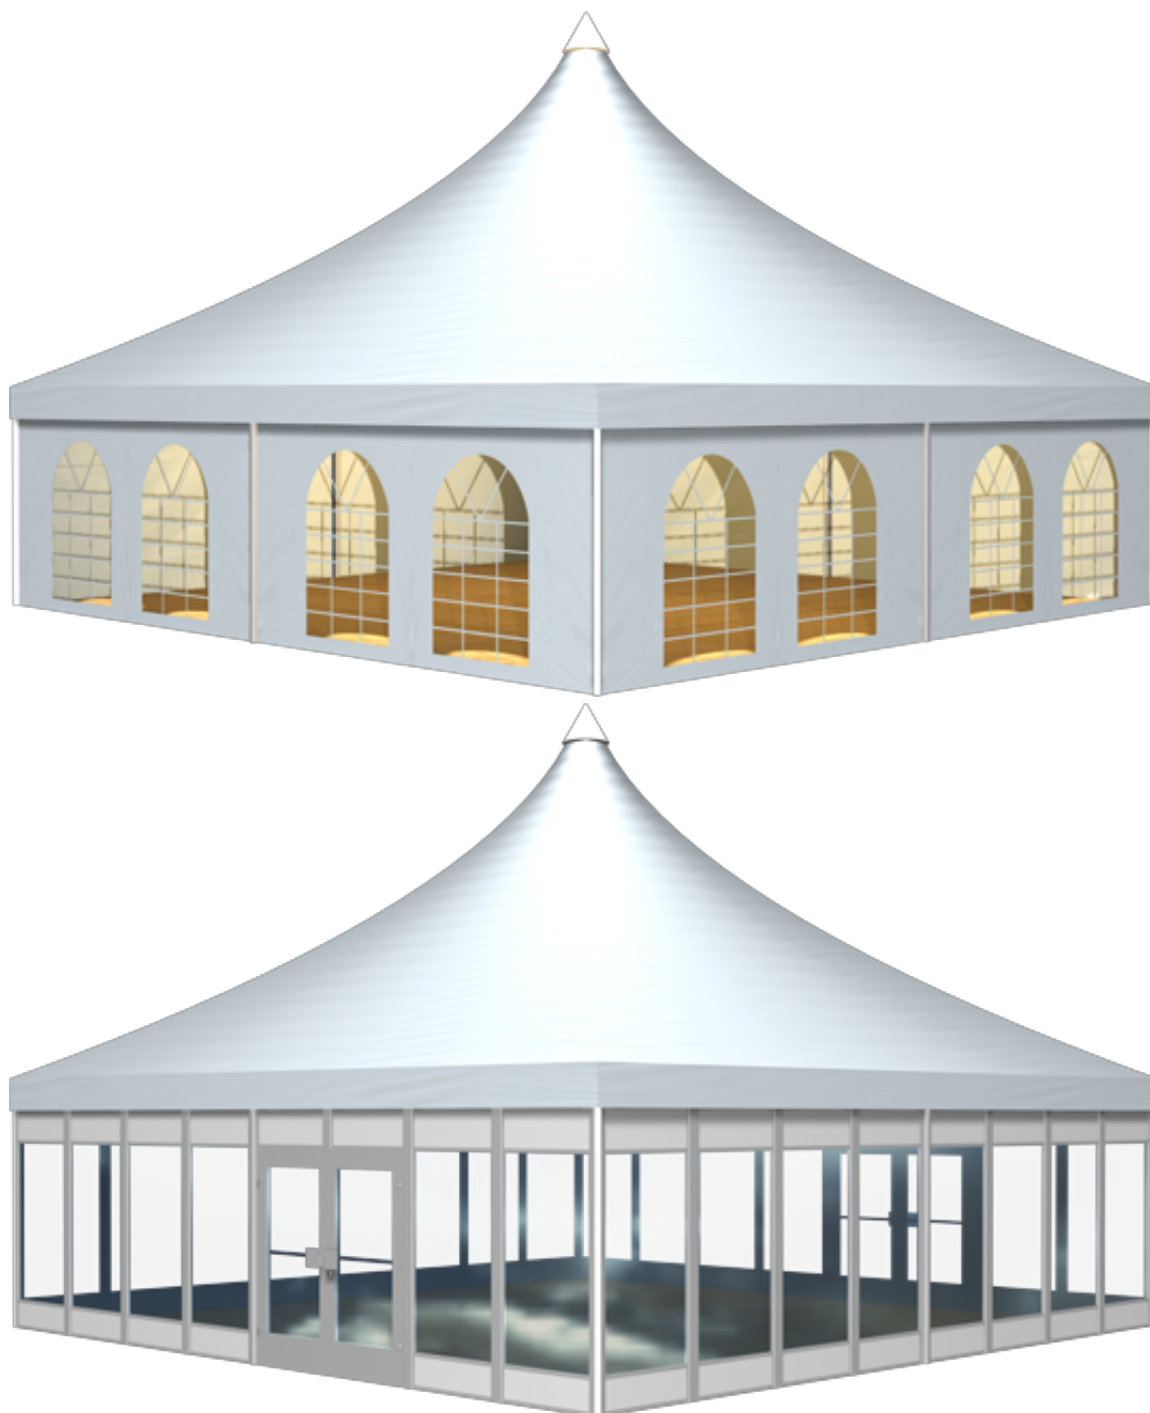

Technical data

Clear-span width
Side height

974 cm
250cm, 300 cm

Ridge height	780cm, 830 cm
Longest component	550 cm
Main profile	116 mm x 116 mm x 3 mm
Eave / corner connection	Internal eave insert
Covered area	100 m ²
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m ²
Extension / lean-to options	By using rain gutters can be connected to further tents of the same design in any form and to any length
Flooring options	Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

