


Tent image

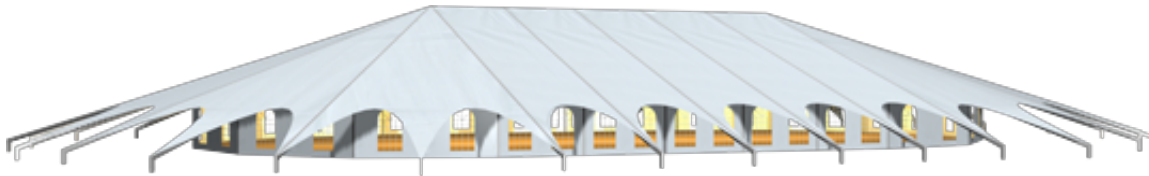

Technical data

<b>Main ship clear-span width</b>	3000-5000 cm
<b>Total clear-span width</b>	5100 cm
<b>Main ship side height</b>	400 cm
<b>Ridge height</b>	887 cm
<b>Roof pitch</b>	18°
<b>Bay distance</b>	500 cm
<b>Gable uprights</b>	5 gable uprights (per end)
<b>Longest component</b>	1100 cm
<b>Minimum tent length</b>	According to design
<b>Maximum tent length</b>	No limit
<b>Main profile</b>	250 mm x 120 mm x 5/4 mm
<b>Max. allowed wind speed to DIN</b>	100 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup>
<b>Variations</b>	1/2 dodecagonal at gable end
<b>Flooring options</b>	Aluminium cassettefloor with plywood or full aluminiumboards
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

