


Tent image



Technical data

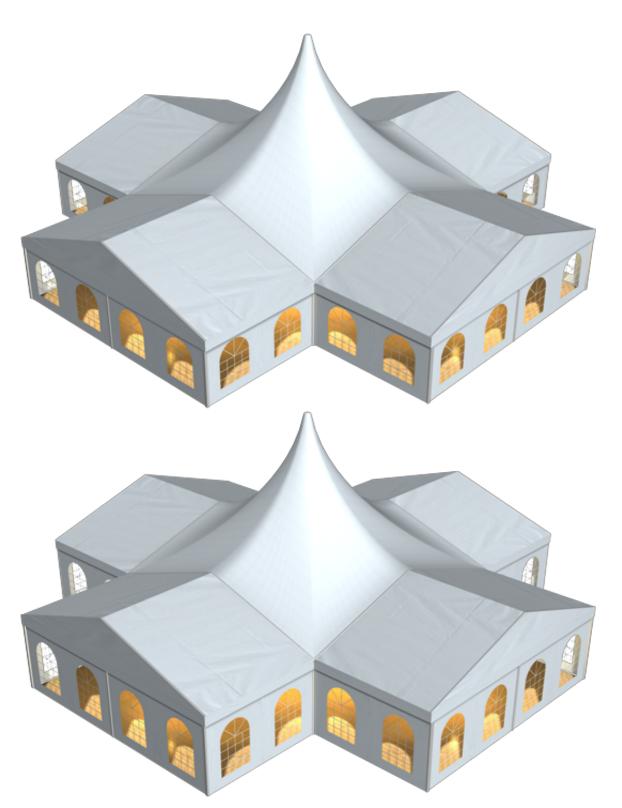

Clear-span width Side height Ridge height Highest point Roof pitch


Bay distance Gable uprights Longest component Minimum tent length Maximum tent length Main profile Eave / corner connection Max. allowed wind speed to DIN Wind Load Extension / lean-to options Flooring options 1000 cm 240 cm, 300 cm 422 cm, 482 cm 902 cm, 962 cm 20°

500 cm 1 gable upright (per end) 525 cm As shown No limit 130 mm x 70 mm x 3 mm Internal eave insert 100 km/h 0.5 kN/m² Octagonal wine tents can also be arranged on each end Aluminium cassettefloor with plywood or full aluminiumboards RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2 Portal beams can be used in place of cross struts

Cover

Special design

Tent top and side view image

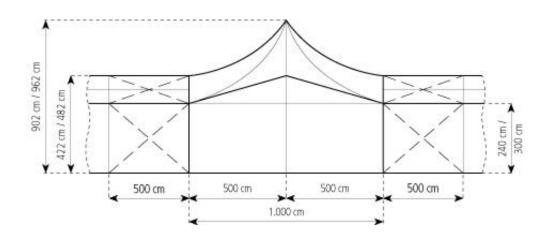

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com

RÖDER Spanning the world.

