


Tent image

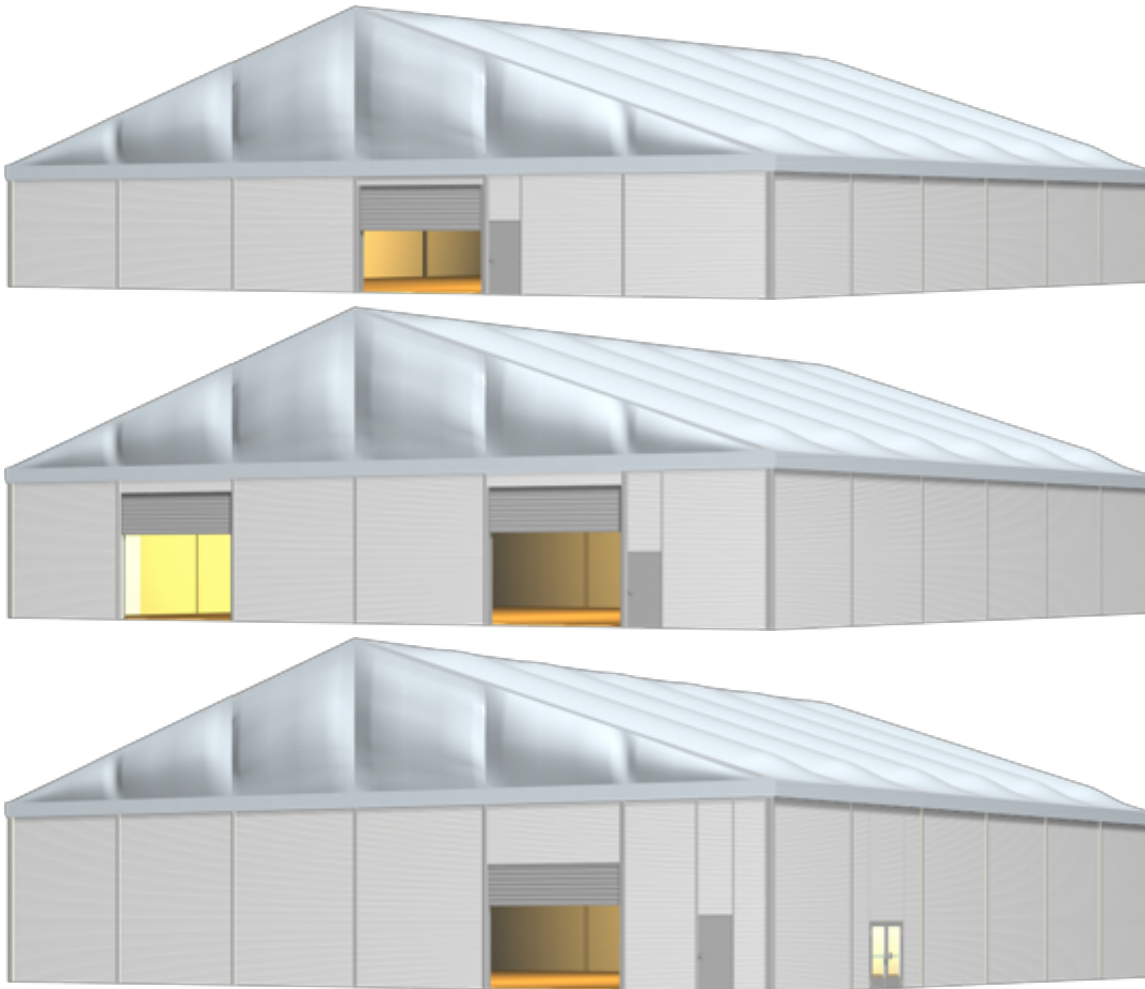

Technical data

Clear-span width	3000 cm
Side height	420cm, 520cm, 620 cm
Ridge height	919cm, 9019cm, 1119 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	5 gable uprights (per end)
Longest component	1075 cm
Minimum tent length	3000 cm
Maximum tent length	No limit
Main profile	334 mm x 122 mm x 8/4.5 mm
Eave / corner connection	Internal eave insert

Max. allowed wind speed to DIN
Wind Load
Snow load
Cover

100 km/h
 0.5 kN/m²
 0.75 kN/m²
 RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2, or inflated textile iso-roof
 Portal beams can be used in place of cross struts
 Strip-galvanized, exterior color coating RAL 9002 (grey-white), protective paint coating inside iso-sandwich elements

Special design
Trapezoidal metal sheets

Tent top and side view image

