


Tent image

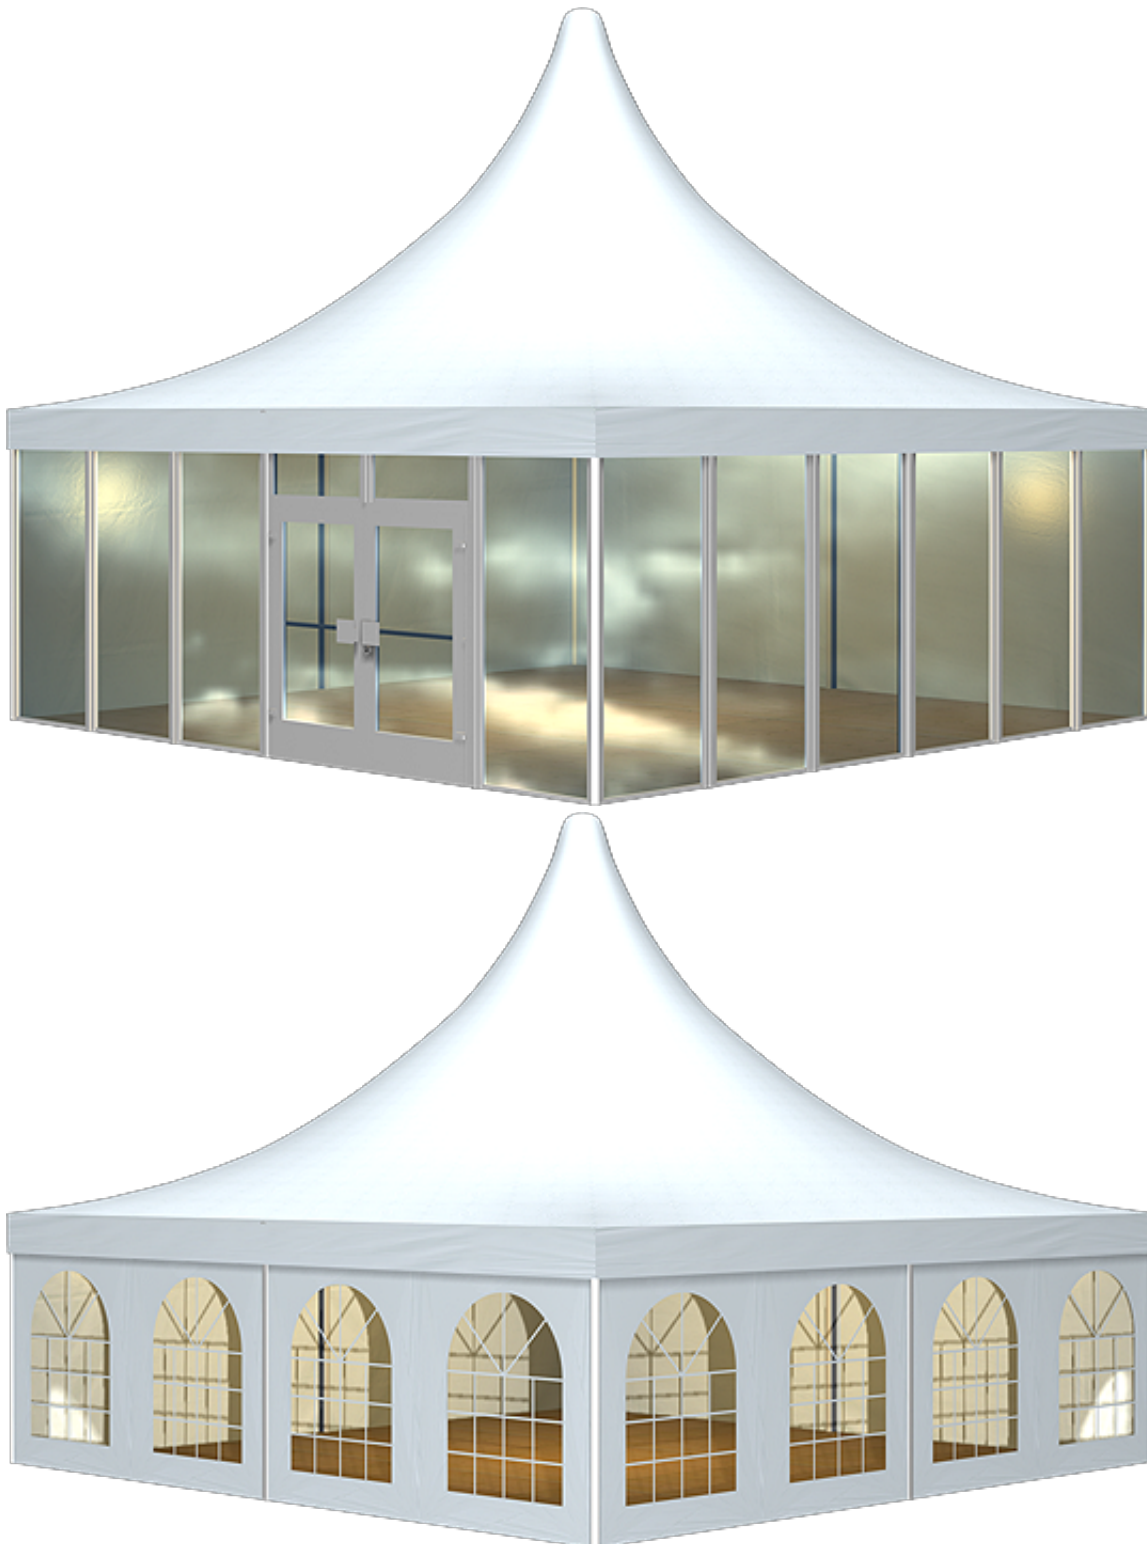

Technical data

|                                       |                                                                                                                                |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>Clear-span width</b>               | 800 cm                                                                                                                         |
| <b>Side height</b>                    | 240 cm, 300 cm                                                                                                                 |
| <b>Ridge height</b>                   | 382 cm, 448 cm                                                                                                                 |
| <b>Highest point</b>                  | 622, 682                                                                                                                       |
| <b>Roof pitch</b>                     | 20° / 21,2°                                                                                                                    |
| <b>Longest component</b>              | 567 cm                                                                                                                         |
| <b>Main profile</b>                   | 130 mm x 70 mm x 3 mm                                                                                                          |
| <b>Eave / corner connection</b>       | Internal eave insert                                                                                                           |
| <b>Max. allowed wind speed to DIN</b> | 80 km/h                                                                                                                        |
| <b>Wind Load</b>                      | 0.3 kN/m <sup>2</sup>                                                                                                          |
| <b>Flooring options</b>               | Woodenfloor with timber or steel sub-construction<br>Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor |
| <b>Cover</b>                          | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2                                                  |
| <b>Special design</b>                 | By using compactfloor anchoring can be omitted                                                                                 |

Tent top and side view image

