


Tent image

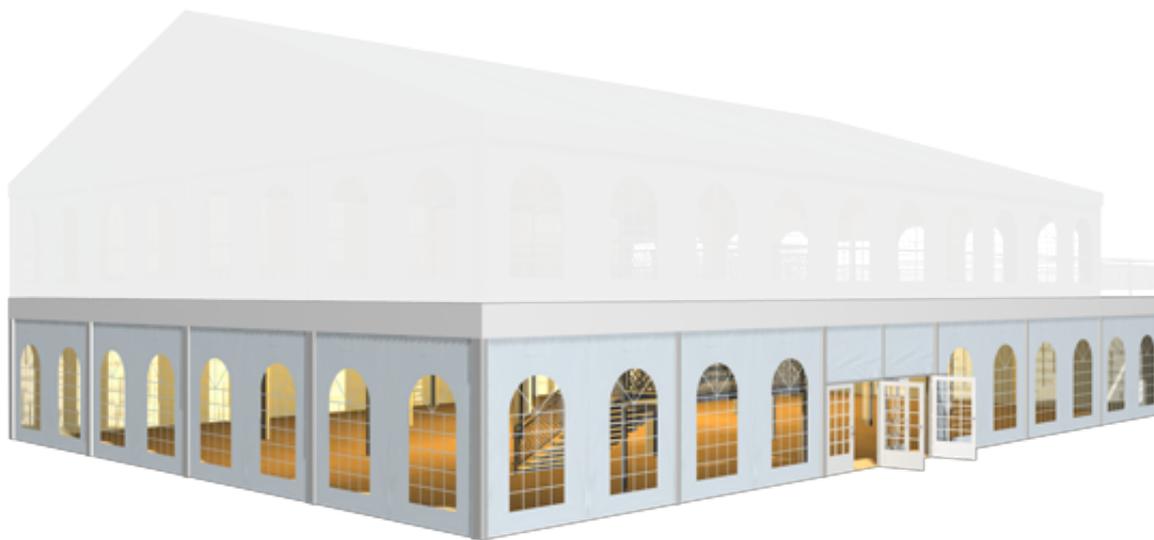

Technical data

Clear-span width	1000-3000 cm
Side height	415 cm
Bay distance	500 cm
Main profile	285 mm x 124 mm x 5.2 mm
Working load on platform	500 kg/m ²
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m ²
Extension / lean-to options	Can be extended to any length in certain variants
Flooring options	Woodenfloor with timber or steel sub-construction Heavy-flooringsystem without anchoring Aluminium cassette floor with full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Note	The types of tent which are erected on the bi-level tent must be viewed separately
Possible utilization	2nd level can be completely or partially covered, or used as a terrace

Tent top and side view image

