


Tent image

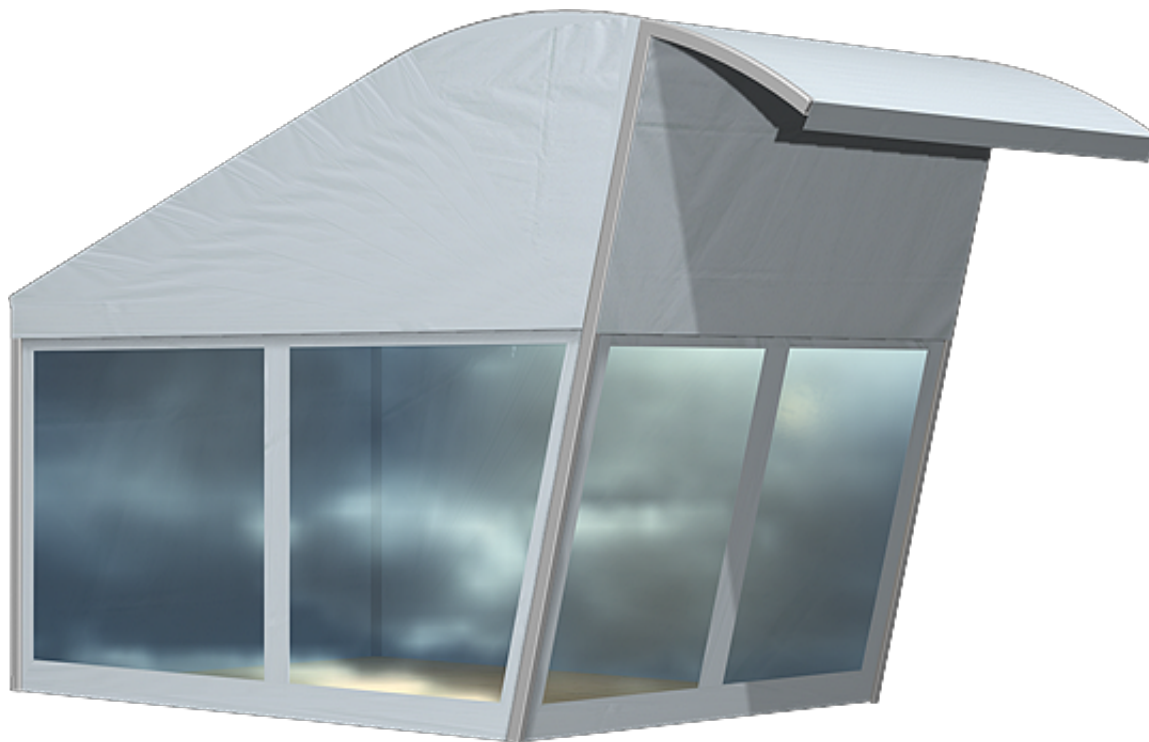

Technical data

Clear-span width	400 cm
Side height	229 cm
Ridge height	373 cm
Roof pitch	25°
Bay distance	300 cm
Longest component	432 cm
Minimum tent length	300 cm
Maximum tent length	No limit
Main profile	81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm)
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	80 km/h
Wind Load	0.3 kN/m ²
Flooring options	Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross struts By using compactfloor anchoring can be omitted

Tent top and side view image

