


Tent image

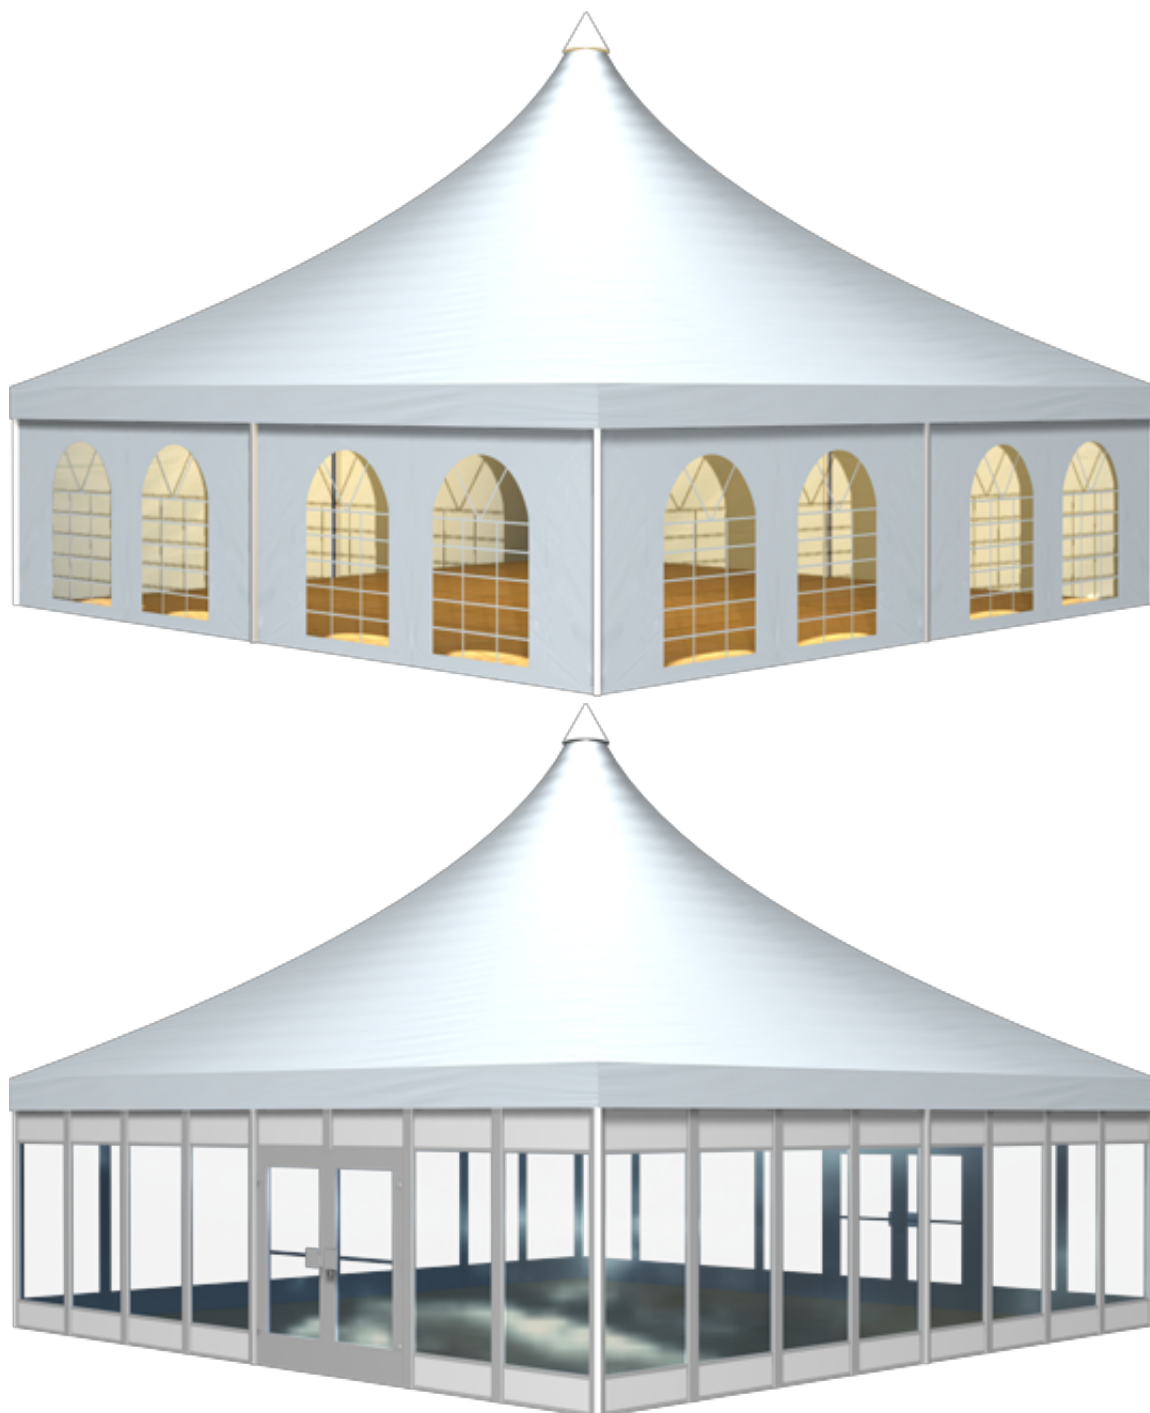

Technical data

**Clear-span width**  
**Side height**

974 cm  
250cm, 300 cm

|                                       |  |
|---------------------------------------|--|
| <b>Ridge height</b>                   | 780cm, 830 cm  |
| <b>Longest component</b>              | 550 cm   |
| <b>Main profile</b>                   | 116 mm x 116 mm x 3 mm   |
| <b>Eave / corner connection</b>       | Internal eave insert   |
| <b>Covered area</b>                   | 100 m <sup>2</sup>   |
| <b>Max. allowed wind speed to DIN</b> | 100 km/h   |
| <b>Wind Load</b>                      | 0.5 kN/m <sup>2</sup>  |
| <b>Extension / lean-to options</b>    | By using rain gutters can be connected to further tents of the same design in any form and to any length |
| <b>Flooring options</b>               | Aluminium cassettefloor with plywood or full aluminiumboards   |
| <b>Cover</b>                          | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2                            |

Tent top and side view image

