


Tent image

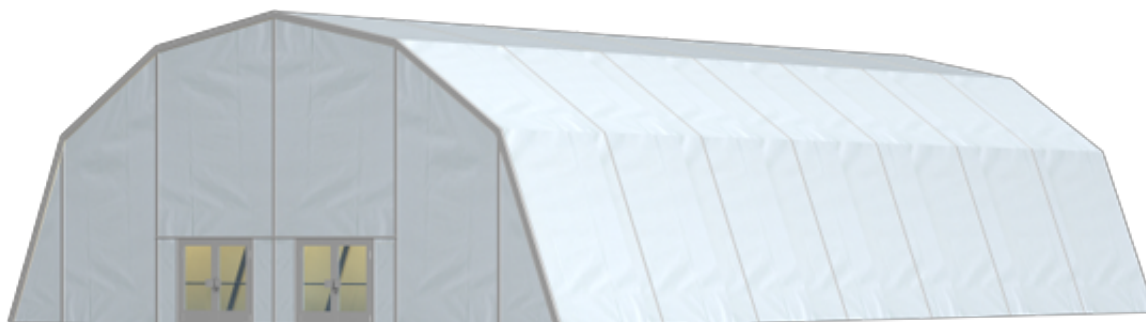

Technical data

Clear-span width	1800 cm
Side height	500 cm
Ridge height	861 cm
Bay distance	515 cm
Gable uprights	5 gable uprights (per end)
Longest component	780 cm
Minimum tent length	3090 cm
Maximum tent length	No limit
Main profile	220 mm x 100 mm x 4 mm
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m ²
Flooring options	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

