


Tent image

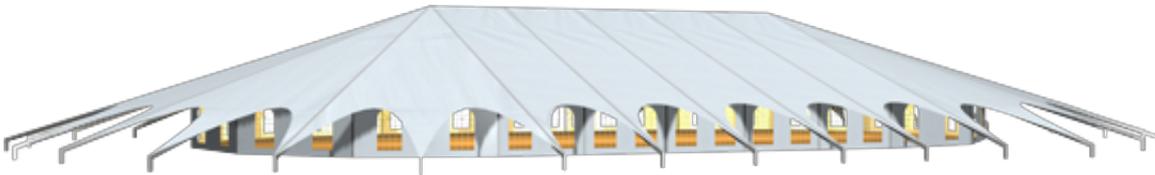

Technical data

| | |
|---------------------------------------|---|
| Main ship clear-span width | 3000-5000 cm |
| Total clear-span width | 5100 cm |
| Main ship side height | 400 cm |
| Ridge height | 887 cm |
| Roof pitch | 18° |
| Bay distance | 500 cm |
| Gable uprights | 5 gable uprights (per end) |
| Longest component | 1100 cm |
| Minimum tent length | According to design |
| Maximum tent length | No limit |
| Main profile | 250 mm x 120 mm x 5/4 mm |
| Max. allowed wind speed to DIN | 100 km/h |
| Wind Load | 0.5 kN/m ² |
| Variations | 1/2 dodecagonal at gable end |
| Flooring options | Aluminium cassettefloor with plywood or full aluminiumboards |
| Cover | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2 |

Tent top and side view image

