


Tent image

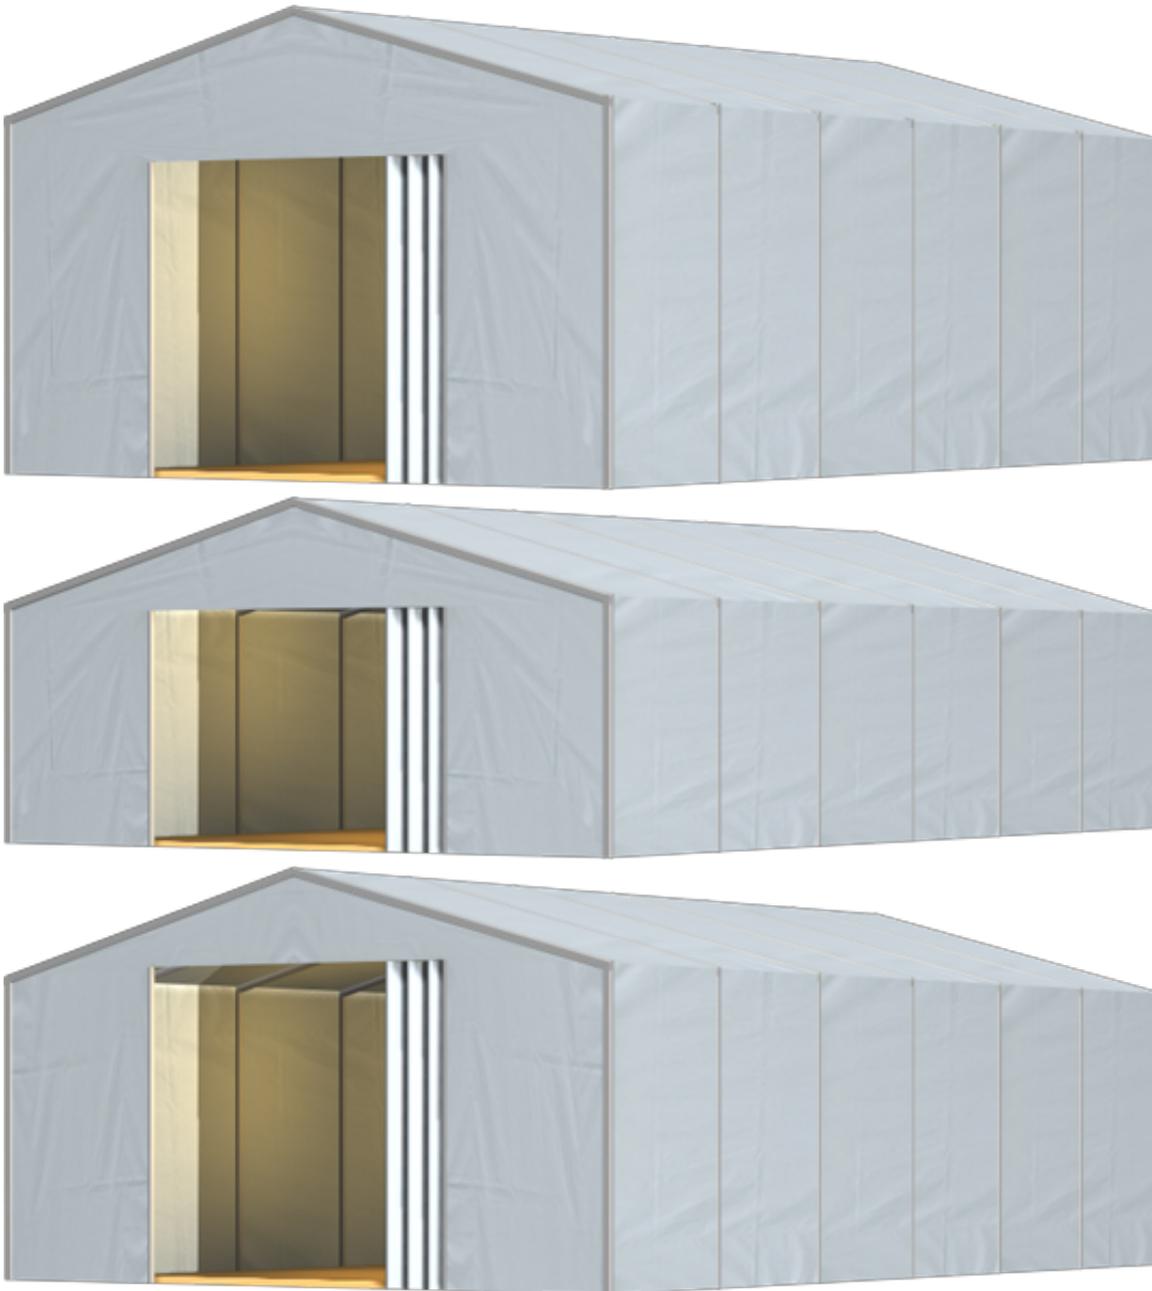

Technical data

<b>Clear-span width</b>	1000 cm
<b>Side height</b>	350 cm, 440cm, 500cm
<b>Ridge height</b>	484 cm, 574cm, 643cm
<b>Roof pitch</b>	15°

<b>Bay distance</b>	250 cm
<b>Gable uprights</b>	2 gable uprights (per end)
<b>Longest component</b>	524 cm, 526cm, 552cm
<b>Minimum tent length</b>	500 cm, 750cm
<b>Maximum tent length</b>	No limit
<b>Main profile</b>	130 mm x 88 mm x 3 mm, 170 mm x 88 mm x 3 mm
<b>Door sizes (PVC door panels)</b>	Side wall 220 cm / 450 cm x 300 cm Gable end 450 cm x 390 cm, Side wall 220 cm / 450 cm x 390 cm Gable end 450 cm x 430 cm, Side wall 220 cm / 450 cm x 450 cm Gable end 450 cm x 430 cm
<b>Eave / corner connection</b>	Internal eave insert
<b>Max. allowed wind speed to DIN</b>	80 km/h, 100 km/h
<b>Wind Load</b>	0.3 kN/m <sup>2</sup> , 0.5 kN/m <sup>2</sup>
<b>Snow load</b>	0.25 (0.75) kN/m <sup>2</sup> , 0.25 kN/m <sup>2</sup>
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
<b>Special design</b>	Also available in fold-up version Sliding doors, rolling doors or service entrances Trapezoidal metal sheets Snow load 0.25 kN/m <sup>2</sup> : Movable system on rollers

Tent top and side view image

