
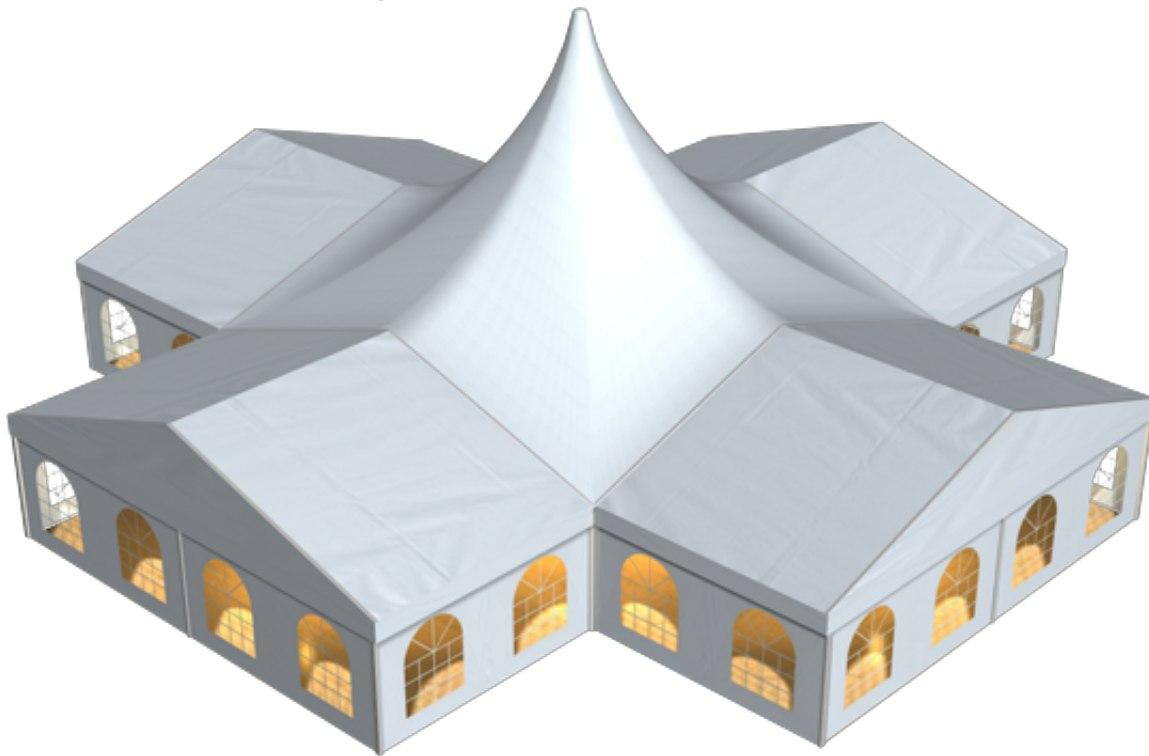


Tent image

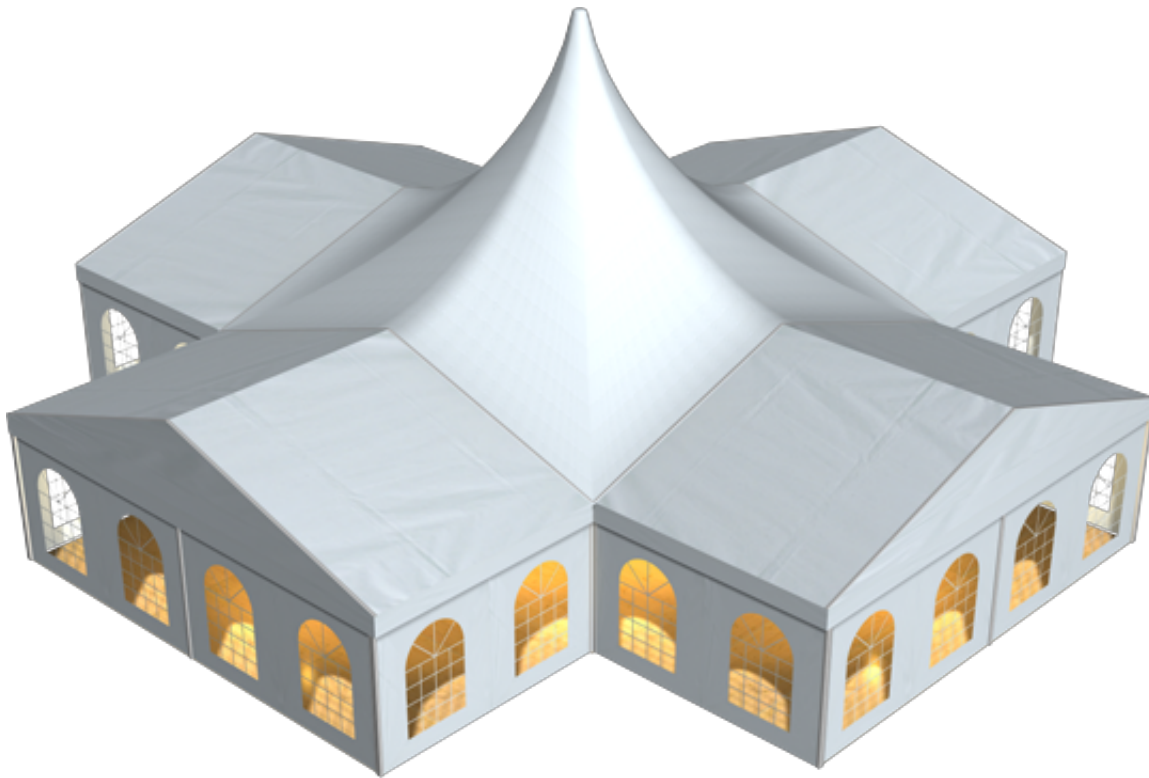

Technical data

<b>Clear-span width</b>	1000 cm
<b>Side height</b>	240 cm, 300 cm
<b>Ridge height</b>	422 cm, 482 cm
<b>Highest point</b>	902 cm, 962 cm
<b>Roof pitch</b>	20°
<b>Bay distance</b>	500 cm
<b>Gable uprights</b>	1 gable upright (per end)
<b>Longest component</b>	525 cm
<b>Minimum tent length</b>	As shown
<b>Maximum tent length</b>	No limit
<b>Main profile</b>	130 mm x 70 mm x 3 mm
<b>Eave / corner connection</b>	Internal eave insert
<b>Max. allowed wind speed to DIN</b>	100 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	Octagonal wine tents can also be arranged on each end
<b>Flooring options</b>	Aluminium cassettefloor with plywood or full aluminiumboards
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
<b>Special design</b>	Portal beams can be used in place of cross struts

Tent top and side view image

