


Tent image

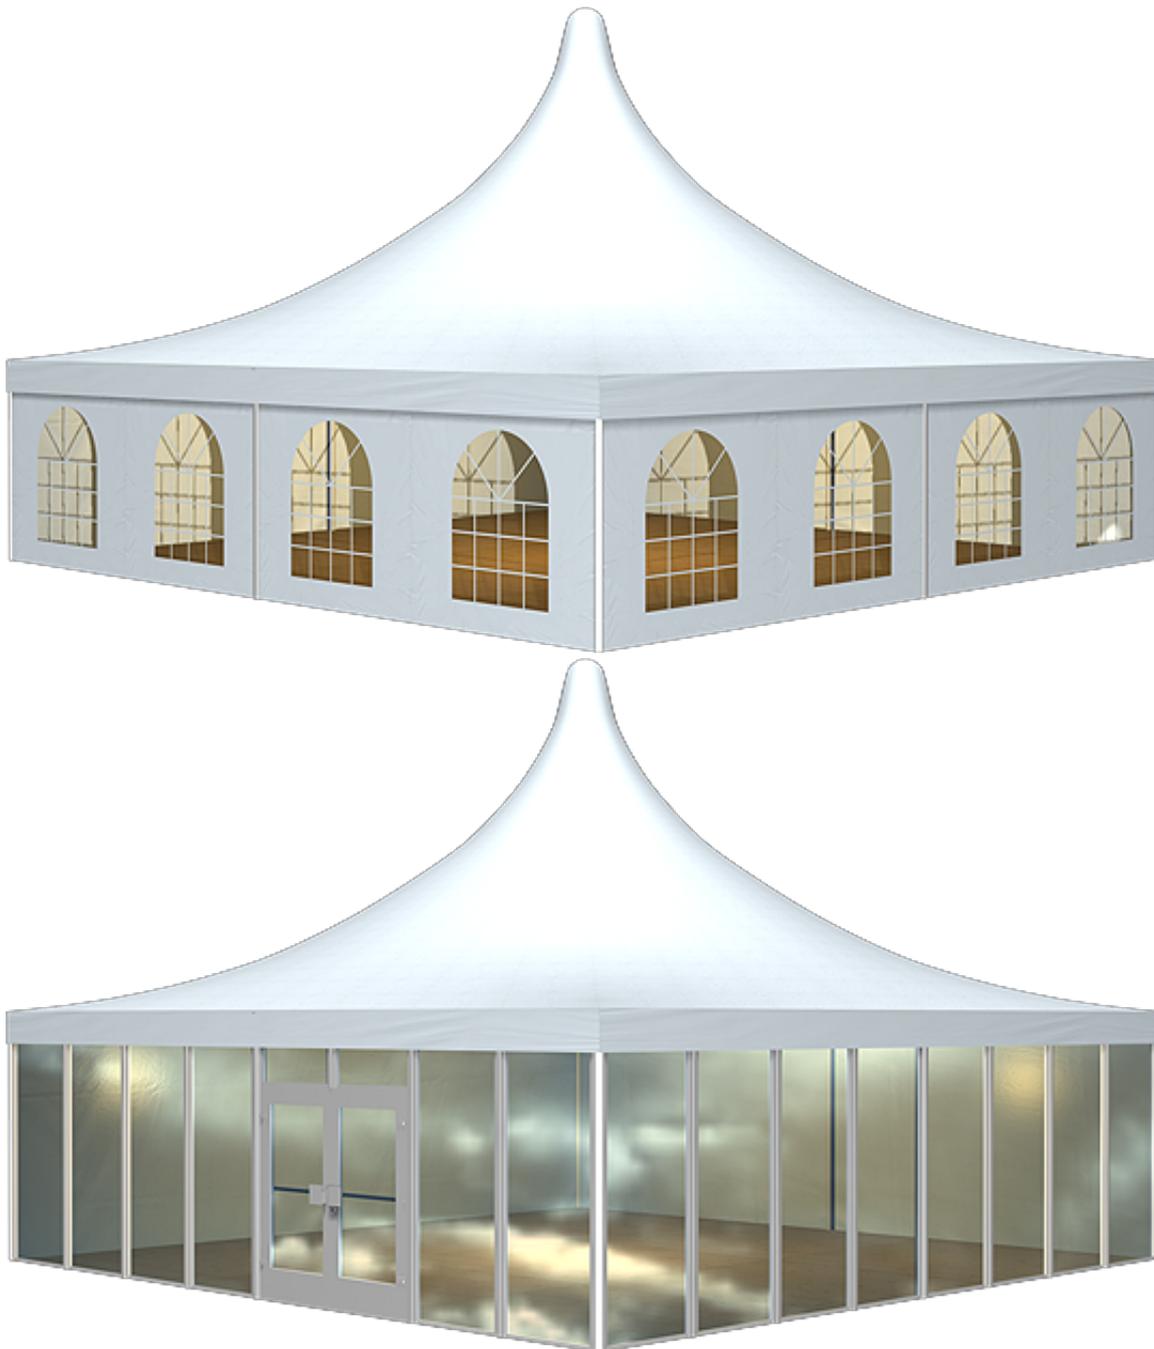

Technical data

Clear-span width	1000 cm
Side height	240 cm, 300 cm
Ridge height	422 cm, 485 cm
Highest point	659, 719

Roof pitch	20° / 21,2°
Longest component	714 cm
Main profile	130 mm x 70 mm x 3 mm
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	80 km/h
Wind Load	0.3 kN/m ²
Flooring options	Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Special design	By using compactfloor anchoring can be omitted

Tent top and side view image

