


Tent image

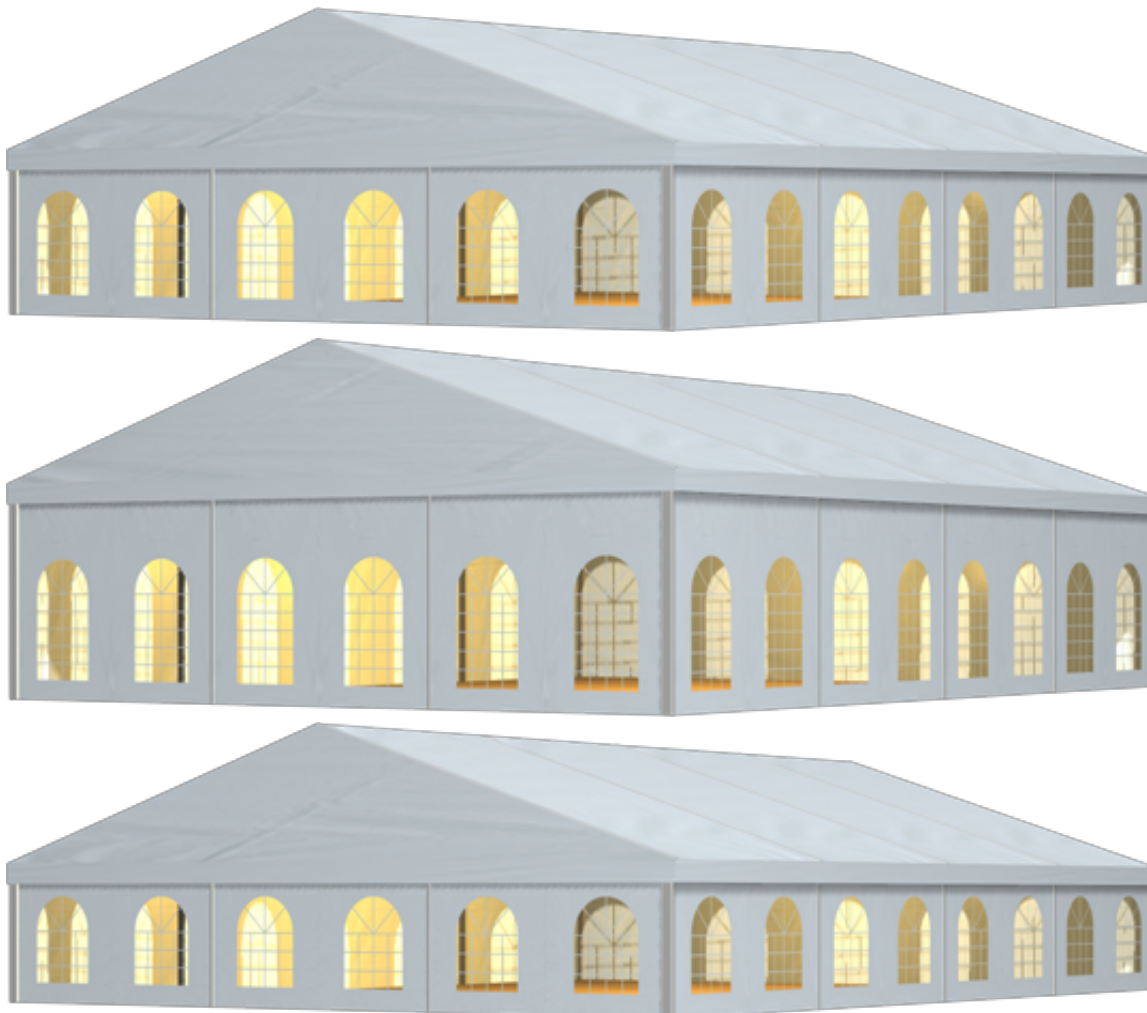

Technical data

Clear-span width	1500 cm
Side height	240 cm, 300 cm, 400 cm
Ridge height	480 cm, 540 cm, 640 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	2 gable uprights (per end)
Longest component	800 cm
Minimum tent length	1000 cm
Maximum tent length	No limit
Main profile	220 mm x 100 mm x 3 mm
Eave / corner connection	Slide connection, Twin-pin connection with corner strut
Max. allowed wind speed to DIN	100 km/h

Wind Load

0.5 kN/m²

Extension / lean-to options

Extension (max. span 400 cm, located anywhere, both sides, any length) 1/2 octagonal at gable end, Extension (max. span 500 cm located anywhere, both sides, any length)

Flooring options

Woodenfloor with timber or steel sub-construction
 Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor

Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross struts By using compactfloor anchoring can be omitted, Portal beams can be used in place of cross struts

Tent top and side view image

